

FUEL DISPENSER SERIES

加油机系列

CE / ATEX APPROVAL



YONGJIA WELLDONE MACHINE CO.,LTD **WENZHOU HUIYANG ENERGY TECHNOLOGY CO.,LTD**

Add: No.5 Weiyi East Road, Longwan, Wenzhou, Zhejiang, China
Email: sales@welldonemachine.com Instagram: Welldone Machine
Email: contact@hydispenser.com Twitter: @Welldone Machine

Tel: +86-577-21828499 Fax: +86-577-21828482
Facebook: Huiyang Energy Skype: cute-room
Facebook: WelldoneMachine Youtube: Welldone Machine

WhatsApp: +86-15825667273
Website: www.wdmachine.com
Website: www.hydispenser.com



WDWF222



WDWF244



WDWF224



WDWF362

油量区6位, 金额6位, 单价区4位 (664)
油量区8位, 金额8位, 单价区6位 (886)

6 digits in volume, 6 digits in amount, and 4 digits in unit price (664)
8 digits in volume, 8 digits in amount, and 6 digits in unit price (886)

产品功能 Product Features

电子校准

锁定泵的功能

加油限时功能

具有锁机功能

具有金额整停功能

Electronic Calibration.

Locking pump function

Fueling time limit function

Lock machine function

Can set the decimal point for the display, so can be used in many country with different currency rate.

Can choose 7 digits for electromagnetic counter or 9 digits for Mechanical totalizer counter.

Leaves the communication ports, so it can communicate with the gas station management system.

Option GPRS function , connect with mobile phone to check data and set unit price anytime anywhere

可带太阳能功能

可带触摸屏

可带手摇功能

可带多媒体

可接受定制

Option solar power function

Option touch screen

Can add handshake function

Option media

可选配音音报数及打印输出功能

具有小数点移位功能, 适用于不同国家货币要求

可选配机械累计计数器

留有通讯口, 可与油站管理系统连接

可带GPRS功能和手机联网

Can do OEM as required

Integer number stop function

Optional voice reporting and printout functions

主要技术参数 Technical Specification

适应温度 Working temperature

-40℃~+55℃

相对湿度 Relative humidity

≤95%

大气压力 Air pressure

86~106KPa

电压 Voltage

AC220V±20% 或 AC380V±20%

频率 Frequency

(50±1)HZ√ (60±1)HZ

单次计数范围 Single range

1~9999.99 ,1~999999.99(Changeable可变)

班累计数范围 Range of cumulative number of classes

0~99999999

单价设定范围 Unit price setting range

0~9999,0~999999(Changeable可变)

总累计数范围 Accumulative range

0~9999999999.99

电磁阀设置范围 Solenoid valve turn off setting range

0~0.99L

枪数 Nozzle No.

1把~10把 (可定制) From1~10 (OEM)

泵类型 Pump type

自吸泵/潜油泵 Suction pump/submersible pump



WDTF224-L



WDTF366-L



WDTF362-L

油量区6位, 金额6位, 单价区4位 (664)
油量区8位, 金额8位, 单价区6位 (886)

6 digits in volume, 6 digits in amount, and 4 digits in unit price (664)
8 digits in volume, 8 digits in amount, and 6 digits in unit price (886)

产品功能 Product Features

电子校准
锁定泵的功能
加油限时功能
具有锁机功能
具有金额整停功能

Electronic Calibration.
Locking pump function
Fueling time limit function
Lock machine function

可带太阳能功能
可带触摸屏
可带手摇功能
可带多媒体
可接受定制

Option solar power function
Option touch screen
Can add handshake function
Option media

可选配语音报数及打印输出功能
具有小数点移位功能, 适用于不同国家货币要求
可选配机械累计计数器
留有通讯口, 可与油站管理系统连接
可带GPRS功能和手机联网

Can do OEM as required
Integer number stop function
Optional voice reporting and printout functions

Can set the decimal point for the display, so can be used in many country with different currency rate.
Can choose 7 digits for electromagnetic counter or 9 digits for Mechanical totalizer counter.
Leaves the communication ports, so it can communicate with the gas station management system.
Option GPRS function , connect with mobile phone to check data and set unit price anytime anywhere

主要技术参数 Technical Specification

适应温度 Working temperature	-40℃~+55℃
相对湿度 Relative humidity	≤95%
大气压力 Air pressure	86~106KPa
电压 Voltage	AC220V±20% 或 AC380V±20%
频率 Frequency	(50±1)HZ√ (60±1)HZ
单次计数范围 Single range	1~9999.99 ,1~999999.99(Changeable可变)
班累计数范围 Range of cumulative number of classes	0~99999999
单价设定范围 Unit price setting range	0~9999,0~999999(Changeable可变)
总累计数范围 Accumulative range	0~9999999999.99
电磁阀设置范围 Solenoid valve turn off setting range	0~0.99L
枪数 Nozzle No.	1把~10把 (可定制) From1~10 (OEM)
泵类型 Pump type	自吸泵/潜油泵 Suction pump/submersible pump



WDTF366

WDTF244

WDTF224

油量区6位, 金额6位, 单价区4位 (664)
油量区8位, 金额8位, 单价区6位 (886)

6 digits in volume, 6 digits in amount, and 4 digits in unit price (664)
8 digits in volume, 8 digits in amount, and 6 digits in unit price (886)

产品功能 Product Features

电子校准
锁定泵的功能
加油限时功能
具有锁机功能
具有金额整停功能

Electronic Calibration.
Locking pump function
Fueling time limit function
Lock machine function

Can set the decimal point for the display, so can be used in many country with different currency rate.
Can choose 7 digits for electromagnetic counter or 9 digits for Mechanical totalizer counter.

Leaves the communication ports, so it can communicate with the gas station management system.

Option GPRS function , connect with mobile phone to check data and set unit price anytime anywhere

可带太阳能功能
可带触摸屏
可带手摇功能
可带多媒体
可接受定制

Option solar power function
Option touch screen
Can add handshake function
Option media

可选配音音报数及打印输出功能
具有小数点移位功能, 适用于不同国家货币要求
可选配机械累计计数器
留有通讯口, 可与油站管理系统连接
可带GPRS功能和手机联网

Can do OEM as required
Integer number stop function
Optional voice reporting and printout functions

主要技术参数 Technical Specification

适应温度 Working temperature	-40℃~+55℃
相对湿度 Relative humidity	≤95%
大气压力 Air pressure	86~106KPa
电压 Voltage	AC220V±20% 或 AC380V±20%
频率 Frequency	(50±1)HZ√ (60±1)HZ
单次计数范围 Single range	1~9999.99 ,1~999999.99(Changeable可变)
班累计数范围 Range of cumulative number of classes	0~99999999
单价设定范围 Unit price setting range	0~9999,0~999999(Changeable可变)
总累计数范围 Accumulative range	0~9999999999.99
电磁阀设置范围 Solenoid valve turn off setting range	0~0.99L
枪数 Nozzle No.	1把~10把 (可定制) From1~10 (OEM)
泵类型 Pump type	自吸泵/潜油泵 Suction pump/submersible pump



Wdff224



Wdff244



Wdff366

油量区6位, 金额6位, 单价区4位 (664)
油量区8位, 金额8位, 单价区6位 (886)

6 digits in volume, 6 digits in amount, and 4 digits in unit price (664)
8 digits in volume, 8 digits in amount, and 6 digits in unit price (886)

产品功能 Product Features

电子校准

锁定泵的功能

加油限时功能

具有锁机功能

具有金额整停功能

Electronic Calibration.

Locking pump function

Fueling time limit function

Lock machine function

Can set the decimal point for the display, so can be used in many country with different currency rate.

Can choose 7 digits for electromagnetic counter or 9 digits for Mechanical totalizer counter.

Leaves the communication ports, so it can communicate with the gas station management system.

Option GPRS function , connect with mobile phone to check data and set unit price anytime anywhere

可带太阳能功能

可带触摸屏

可带手摇功能

可带多媒体

可接受定制

Option solar power function

Option touch screen

Can add handshake function

Option media

可选配音音报数及打印输出功能

具有小数点移位功能, 适用于不同国家货币要求

可选配机械累计计数器

留有通讯口, 可与油站管理系统连接

可带GPRS功能和手机联网

Can do OEM as required

Integer number stop function

Optional voice reporting and printout functions

主要技术参数 Technical Specification

适应温度 Working temperature

-40℃~+55℃

相对湿度 Relative humidity

≤95%

大气压力 Air pressure

86~106KPa

电压 Voltage

AC220V±20% 或 AC380V±20%

频率 Frequency

(50±1)HZ√ (60±1)HZ

单次计数范围 Single range

1~9999.99 ,1~999999.99(Changeable可变)

班累计数范围 Range of cumulative number of classes

0~99999999

单价设定范围 Unit price setting range

0~9999,0~999999(Changeable可变)

总累计数范围 Accumulative range

0~9999999999.99

电磁阀设置范围 Solenoid valve turn off setting range

0~0.99L

枪数 Nozzle No.

1把~10把 (可定制) From1~10 (OEM)

泵类型 Pump type

自吸泵/潜油泵 Suction pump/submersible pump



油量区6位, 金额6位, 单价区4位 (664)
油量区8位, 金额8位, 单价区6位 (886)

6 digits in volume, 6 digits in amount, and 4 digits in unit price (664)
8 digits in volume, 8 digits in amount, and 6 digits in unit price (886)

产品功能 Product Features

电子校准
锁定泵的功能
加油限时功能
具有锁机功能
具有金额整停功能

Electronic Calibration.
Locking pump function
Fueling time limit function
Lock machine function

Can set the decimal point for the display, so can be used in many country with different currency rate.
Can choose 7 digits for electromagnetic counter or 9 digits for Mechanical totalizer counter.

Leaves the communication ports, so it can communicate with the gas station management system.

Option GPRS function , connect with mobile phone to check data and set unit price anytime anywhere

可带太阳能功能
可带触摸屏
可带手摇功能
可带多媒体
可接受定制

Option solar power function
Option touch screen
Can add handshake function
Option media

可选配音音报数及打印输出功能
具有小数点移位功能, 适用于不同国家货币要求
可选配机械累计计数器
留有通讯口, 可与油站管理系统连接
可带GPRS功能和手机联网

Can do OEM as required
Integer number stop function
Optional voice reporting and printout functions

主要技术参数 Technical Specification

适应温度 Working temperature	-40℃~+55℃
相对湿度 Relative humidity	≤95%
大气压力 Air pressure	86~106KPa
电压 Voltage	AC220V±20% 或 AC380V±20%
频率 Frequency	(50±1)HZ√ (60±1)HZ
单次计数范围 Single range	1~9999.99 ,1~999999.99(Changeable可变)
班累计数范围 Range of cumulative number of classes	0~99999999
单价设定范围 Unit price setting range	0~9999,0~999999(Changeable可变)
总累计数范围 Accumulative range	0~9999999999.99
电磁阀设置范围 Solenoid valve turn off setting range	0~0.99L
枪数 Nozzle No.	1把~10把 (可定制) From1~10 (OEM)
泵类型 Pump type	自吸泵/潜油泵 Suction pump/submersible pump



WDEF224



WDEF362

产品功能 Product Features

电子校准
锁定泵的功能
加油限时功能
具有锁机功能
具有金额整停功能

Electronic Calibration.
Locking pump function
Fueling time limit function
Lock machine function

Can set the decimal point for the display, so can be used in many country with different currency rate.

Can choose 7 digits for electromagnetic counter or 9 digits for Mechanical totalizer counter.

Leaves the communication ports, so it can communicate with the gas station management system.

Option GPRS function , connect with mobile phone to check data and set unit price anytime anywhere

可带太阳能功能
可带触摸屏
可带手摇功能
可带多媒体
可接受定制

Option solar power function
Option touch screen
Can add handshake function
Option media

可选配音音报数及打印输出功能
具有小数点移位功能, 适用于不同国家货币要求
可选配机械累计计数器
留有通讯口, 可与油站管理系统连接
可带GPRS功能和手机联网

Can do OEM as required
Integer number stop function
Optional voice reporting and printout functions

主要技术参数 Technical Specification

适应温度 Working temperature	-40℃~+55℃
相对湿度 Relative humidity	≤95%
大气压力 Air pressure	86~106KPa
电压 Voltage	AC220V±20% 或 AC380V±20%
频率 Frequency	(50±1)HZ√ (60±1)HZ
单次计数范围 Single range	1~9999.99 ,1~999999.99(Changeable可变)
班累计数范围 Range of cumulative number of classes	0~99999999
单价设定范围 Unit price setting range	0~9999,0~999999(Changeable可变)
总累计数范围 Accumulative range	0~9999999999.99
电磁阀设置范围 Solenoid valve turn off setting range	0~0.99L
枪数 Nozzle No.	1把~10把 (可定制) From1~10 (OEM)
泵类型 Pump type	自吸泵/潜油泵 Suction pump/submersible pump



WDQF222-Q

产品功能 Product Features

电子校准

锁定泵的功能

加油限时功能

具有锁机功能

具有金额整停功能

Electronic Calibration.

Locking pump function

Fueling time limit function

Lock machine function

Can set the decimal point for the display, so can be used in many country with different currency rate.

Can choose 7 digits for electromagnetic counter or 9 digits for Mechanical totalizer counter.

Leaves the communication ports, so it can communicate with the gas station management system.

Option GPRS function , connect with mobile phone to check data and set unit price anytime anywhere

可带太阳能功能

可带触摸屏

可带手摇功能

可带多媒体

可接受定制

Option solar power function

Option touch screen

Can add handshake function

Option media

可选配音音报数及打印输出功能

具有小数点移位功能, 适用于不同国家货币要求

可选配机械累计计数器

留有通讯口, 可与油站管理系统连接

可带GPRS功能和手机联网

Can do OEM as required

Integer number stop function

Optional voice reporting and printout functions

主要技术参数 Technical Specification

适应温度 Working temperature

-40℃~+55℃

相对湿度 Relative humidity

≤95%

大气压力 Air pressure

86~106KPa

电压 Voltage

AC220V±20% 或 AC380V±20%

频率 Frequency

(50±1)HZ√ (60±1)HZ

单次计数范围 Single range

1~9999.99 ,1~999999.99(Changeable可变)

班累计数范围 Range of cumulative number of classes

0~99999999

单价设定范围 Unit price setting range

0~9999,0~999999(Changeable可变)

总累计数范围 Accumulative range

0~9999999999.99

电磁阀设置范围 Solenoid valve turn off setting range

0~0.99L

枪数 Nozzle No.

1把~10把(可定制) From1~10 (OEM)

泵类型 Pump type

自吸泵/潜油泵 Suction pump/submersible pump



WDYF222



WDWAY244-1

产品功能 Product Features

电子校准

锁定泵的功能

加油限时功能

具有锁机功能

具有金额整停功能

Electronic Calibration.

Locking pump function

Fueling time limit function

Lock machine function

Can set the decimal point for the display, so can be used in many country with different currency rate.

Can choose 7 digits for electromagnetic counter or 9 digits for Mechanical totalizer counter.

Leaves the communication ports, so it can communicate with the gas station management system.

Option GPRS function , connect with mobile phone to check data and set unit price anytime anywhere

可带太阳能功能

可带触摸屏

可带手摇功能

可带多媒体

可接受定制

Option solar power function

Option touch screen

Can add handshake function

Option media

可选语音报数及打印输出功能

具有小数点移位功能, 适用于不同国家货币要求

可选配机械累计计数器

留有通讯口, 可与油站管理系统连接

可带GPRS功能和手机联网

Can do OEM as required

Integer number stop function

Optional voice reporting and printout functions

主要技术参数 Technical Specification

适应温度 Working temperature

-40℃~+55℃

相对湿度 Relative humidity

≤95%

大气压力 Air pressure

86~106KPa

电压 Voltage

AC220V±20% 或 AC380V±20%

频率 Frequency

(50±1)HZ√ (60±1)HZ

单次计数范围 Single range

1~9999.99 ,1~999999.99(Changeable可变)

班累计数范围 Range of cumulative number of classes

0~99999999

单价设定范围 Unit price setting range

0~9999,0~999999(Changeable可变)

总累计数范围 Accumulative range

0~9999999999.99

电磁阀设置范围 Solenoid valve turn off setting range

0~0.99L

枪数 Nozzle No.

1把~10把 (可定制) From1~10 (OEM)

泵类型 Pump type

自吸泵/潜油泵 Suction pump/submersible pump



WDWAY366



WDWAY244



WDWAY222

油量区6位, 金额6位, 单价区4位 (664)
油量区8位, 金额8位, 单价区6位 (886)

6 digits in volume, 6 digits in amount, and 4 digits in unit price (664)
8 digits in volume, 8 digits in amount, and 6 digits in unit price (886)

产品功能 Product Features

电子校准
锁定泵的功能
加油限时功能
具有锁机功能
具有金额整停功能

Electronic Calibration.
Locking pump function
Fueling time limit function
Lock machine function

Can set the decimal point for the display, so can be used in many country with different currency rate.

Can choose 7 digits for electromagnetic counter or 9 digits for Mechanical totalizer counter.

Leaves the communication ports, so it can communicate with the gas station management system.

Option GPRS function , connect with mobile phone to check data and set unit price anytime anywhere

可带太阳能功能
可带触摸屏
可带手摇功能
可带多媒体
可接受定制

Option solar power function
Option touch screen
Can add handshake function
Option media

可选配音音报数及打印输出功能
具有小数点移位功能, 适用于不同国家货币要求
可选配机械累计计数器
留有通讯口, 可与油站管理系统连接
可带GPRS功能和手机联网

Can do OEM as required
Integer number stop function
Optional voice reporting and printout functions

主要技术参数 Technical Specification

适应温度 Working temperature	-40℃~+55℃
相对湿度 Relative humidity	≤95%
大气压力 Air pressure	86~106KPa
电压 Voltage	AC220V±20% 或 AC380V±20%
频率 Frequency	(50±1)HZ√ (60±1)HZ
单次计数范围 Single range	1~9999.99 ,1~999999.99(Changeable可变)
班累计数范围 Range of cumulative number of classes	0~99999999
单价设定范围 Unit price setting range	0~9999,0~999999(Changeable可变)
总累计数范围 Accumulative range	0~9999999999.99
电磁阀设置范围 Solenoid valve turn off setting range	0~0.99L
枪数 Nozzle No.	1把~10把 (可定制) From1~10 (OEM)
泵类型 Pump type	自吸泵/潜油泵 Suction pump/submersible pump

加油机系列 Fuel Dispenser

Welldone 汇洋能源



WDF244



WDF362



WDF244-1

油量区6位, 金额6位, 单价区4位 (664)
油量区8位, 金额8位, 单价区6位 (886)

6 digits in volume, 6 digits in amount, and 4 digits in unit price (664)
8 digits in volume, 8 digits in amount, and 6 digits in unit price (886)

产品功能 Product Features

电子校准

锁定泵的功能

加油限时功能

具有锁机功能

具有金额整停功能

Electronic Calibration.

Locking pump function

Fueling time limit function

Lock machine function

Can set the decimal point for the display, so can be used in many country with different currency rate.

Can choose 7 digits for electromagnetic counter or 9 digits for Mechanical totalizer counter.

Leaves the communication ports, so it can communicate with the gas station management system.

Option GPRS function , connect with mobile phone to check data and set unit price anytime anywhere

可带太阳能功能

可带触摸屏

可带手摇功能

可带多媒体

可接受定制

Option solar power function

Option touch screen

Can add handshake function

Option media

可选配音音报数及打印输出功能

具有小数点移位功能, 适用于不同国家货币要求

可选配机械累计计数器

留有通讯口, 可与油站管理系统连接

可带GPRS功能和手机联网

Can do OEM as required

Integer number stop function

Optional voice reporting and printout functions

主要技术参数 Technical Specification

适应温度 Working temperature

-40℃~+55℃

相对湿度 Relative humidity

≤95%

大气压力 Air pressure

86~106KPa

电压 Voltage

AC220V±20% 或 AC380V±20%

频率 Frequency

(50±1)HZ√ (60±1)HZ

单次计数范围 Single range

1~9999.99 ,1~999999.99(Changeable可变)

班累计数范围 Range of cumulative number of classes

0~99999999

单价设定范围 Unit price setting range

0~9999,0~999999(Changeable可变)

总累计数范围 Accumulative range

0~9999999999.99

电磁阀设置范围 Solenoid valve turn off setting range

0~0.99L

枪数 Nozzle No.

1把~10把 (可定制) From1~10 (OEM)

泵类型 Pump type

自吸泵/潜油泵 Suction pump/submersible pump

加油机系列 WDFW Fuel Dispenser

Welldone 汇洋能源



WDFW



WDFW

油量区6位, 金额6位, 单价区4位 (664)

6 digits in volume, 6 digits in amount, and 4 digits in unit price (664)

油量区8位, 金额8位, 单价区6位 (886)

8 digits in volume, 8 digits in amount, and 6 digits in unit price (886)

产品功能 Product Features

电子校准

锁定泵的功能

加油限时功能

具有锁机功能

具有金额整停功能

Electronic Calibration.

Locking pump function

Fueling time limit function

Lock machine function

Can set the decimal point for the display, so can be used in many country with different currency rate.

Can choose 7 digits for electromagnetic counter or 9 digits for Mechanical totalizer counter.

Leaves the communication ports, so it can communicate with the gas station management system.

Option GPRS function , connect with mobile phone to check data and set unit price anytime anywhere

可带太阳能功能

可带触摸屏

可带手摇功能

可带多媒体

可接受定制

Option solar power function

Option touch screen

Can add handshake function

Option media

可选配音音报数及打印输出功能

具有小数点移位功能, 适用于不同国家货币要求

可选配机械累计计数器

留有通讯口, 可与油站管理系统连接

可带GPRS功能和手机联网

Can do OEM as required

Integer number stop function

Optional voice reporting and printout functions

主要技术参数 Technical Specification

适应温度 Working temperature

-40°C~+55°C

相对湿度 Relative humidity

≤95%

大气压力 Air pressure

86~106KPa

电压 Voltage

AC220V±20% 或 AC380V±20%

频率 Frequency

(50±1)HZ√ (60±1)HZ

单次计数范围 Single range

1~9999.99 ,1~999999.99(Changeable可变)

班累计数范围 Range of cumulative number of classes

0~99999999

单价设定范围 Unit price setting range

0~9999,0~999999(Changeable可变)

总累计数范围 Accumulative range

0~9999999999.99

电磁阀设置范围 Solenoid valve turn off setting range

0~0.99L

枪数 Nozzle No.

1把~10把 (可定制) From1~10 (OEM)

泵类型 Pump type

自吸泵/潜油泵 Suction pump/submersible pump



WDJF

油量区6位, 金额6位, 单价区4位 (664)
油量区8位, 金额8位, 单价区6位 (886)



WDAF224

6 digits in volume, 6 digits in amount, and 4 digits in unit price (664)
8 digits in volume, 8 digits in amount, and 6 digits in unit price (886)



WDAF122



WDEF LED

产品功能 Product Features

电子校准

锁定泵的功能

加油限时功能

具有锁机功能

具有金额整停功能

Electronic Calibration.

Locking pump function

Fueling time limit function

Lock machine function

Can set the decimal point for the display, so can be used in many country with different currency rate.

Can choose 7 digits for electromagnetic counter or 9 digits for Mechanical totalizer counter.

Leaves the communication ports, so it can communicate with the gas station management system.

Option GPRS function , connect with mobile phone to check data and set unit price anytime anywhere

可带太阳能功能

可带触摸屏

可带手摇功能

可带多媒体

可接受定制

Option solar power function

Option touch screen

Can add handshake function

Option media

可选配音音报数及打印输出功能

具有小数点移位功能, 适用于不同国家货币要求

可选配机械累计计数器

留有通讯口, 可与油站管理系统连接

可带GPRS功能和手机联网

Can do OEM as required

Integer number stop function

Optional voice reporting and printout functions

主要技术参数 Technical Specification

适应温度 Working temperature

-40℃~+55℃

相对湿度 Relative humidity

≤95%

大气压力 Air pressure

86~106KPa

电压 Voltage

AC220V±20% 或 AC380V±20%

频率 Frequency

(50±1)HZ√ (60±1)HZ

单次计数范围 Single range

1~9999.99 ,1~999999.99(Changeable可变)

班累计数范围 Range of cumulative number of classes

0~99999999

单价设定范围 Unit price setting range

0~9999,0~999999(Changeable可变)

总累计数范围 Accumulative range

0~9999999999.99

电磁阀设置范围 Solenoid valve turn off setting range

0~0.99L

枪数 Nozzle No.

1把~10把 (可定制) From1~10 (OEM)

泵类型 Pump type

自吸泵/潜油泵 Suction pump/submersible pump

加油机系列 Fuel Dispenser

Welldone 汇洋能源



油量区6位, 金额6位, 单价区4位 (664)
油量区8位, 金额8位, 单价区6位 (886)

6 digits in volume, 6 digits in amount, and 4 digits in unit price (664)
8 digits in volume, 8 digits in amount, and 6 digits in unit price (886)

产品功能 Product Features

电子校准

锁定泵的功能

加油限时功能

具有锁机功能

具有金额整停功能

Electronic Calibration.

Locking pump function

Fueling time limit function

Lock machine function

Can set the decimal point for the display, so can be used in many country with different currency rate.

Can choose 7 digits for electromagnetic counter or 9 digits for Mechanical totalizer counter.

Leaves the communication ports, so it can communicate with the gas station management system.

Option GPRS function , connect with mobile phone to check data and set unit price anytime anywhere

可带太阳能功能

可带触摸屏

可带手摇功能

可带多媒体

可接受定制

Option solar power function

Option touch screen

Can add handshake function

Option media

可选配音音报数及打印输出功能

具有小数点移位功能, 适用于不同国家货币要求

可选配机械累计计数器

留有通讯口, 可与油站管理系统连接

可带GPRS功能和手机联网

Can do OEM as required

Integer number stop function

Optional voice reporting and printout functions

主要技术参数 Technical Specification

适应温度 Working temperature

-40°C~+55°C

相对湿度 Relative humidity

≤95%

大气压力 Air pressure

86~106KPa

电压 Voltage

AC220V±20% 或 AC380V±20%

频率 Frequency

(50±1)HZ√ (60±1)HZ

单次计数范围 Single range

1~9999.99 ,1~999999.99(Changeable可变)

班累计数范围 Range of cumulative number of classes

0~99999999

单价设定范围 Unit price setting range

0~9999,0~999999(Changeable可变)

总累计数范围 Accumulative range

0~9999999999.99

电磁阀设置范围 Solenoid valve turn off setting range

0~0.99L

枪数 Nozzle No.

1把~10把 (可定制) From1~10 (OEM)

泵类型 Pump type

自吸泵/潜油泵 Suction pump/submersible pump



WDHF222



WDHF244



WDHF

油量区6位, 金额6位, 单价区4位 (664)
油量区8位, 金额8位, 单价区6位 (886)

6 digits in volume, 6 digits in amount, and 4 digits in unit price (664)
8 digits in volume, 8 digits in amount, and 6 digits in unit price (886)

产品功能 Product Features

电子校准

锁定泵的功能

加油限时功能

具有锁机功能

具有金额整停功能

Electronic Calibration.

Locking pump function

Fueling time limit function

Lock machine function

Can set the decimal point for the display, so can be used in many country with different currency rate.

Can choose 7 digits for electromagnetic counter or 9 digits for Mechanical totalizer counter.

Leaves the communication ports, so it can communicate with the gas station management system.

Option GPRS function , connect with mobile phone to check data and set unit price anytime anywhere

可带太阳能功能

可带触摸屏

可带手摇功能

可带多媒体

可接受定制

Option solar power function

Option touch screen

Can add handshake function

Option media

可选配音音报数及打印输出功能

具有小数点移位功能, 适用于不同国家货币要求

可选配机械累计计数器

留有通讯口, 可与油站管理系统连接

可带GPRS功能和手机联网

Can do OEM as required

Integer number stop function

Optional voice reporting and printout functions

主要技术参数 Technical Specification

适应温度 Working temperature

-40℃~+55℃

相对湿度 Relative humidity

≤95%

大气压力 Air pressure

86~106KPa

电压 Voltage

AC220V±20% 或 AC380V±20%

频率 Frequency

(50±1)HZ√ (60±1)HZ

单次计数范围 Single range

1~9999.99 ,1~999999.99(Changeable可变)

班累计数范围 Range of cumulative number of classes

0~99999999

单价设定范围 Unit price setting range

0~9999,0~999999(Changeable可变)

总累计数范围 Accumulative range

0~9999999999.99

电磁阀设置范围 Solenoid valve turn off setting range

0~0.99L

枪数 Nozzle No.

1把~10把 (可定制) From1~10 (OEM)

泵类型 Pump type

自吸泵/潜油泵 Suction pump/submersible pump

RAS远程系统 Ras Iot System



- 1.RAS物联网系统可用于油(气)站设备通过互联网远程管理加油(气)设备。
- 2.设备实时传输加油数据到数据库,方便油(气)站管理者查看实时数据。
- 3.油(气)站管理者可用过RAS系统,修改设备上面的单价。
- 4.可以通过4G网络连接数据库,我们可以在移动设备上和电脑上打开管理页面。
- 5.通过本地WIFI连接数据库也可以连接数据库,我们可以在移动设备上和电脑上打开管理页面。
- 6.RAS系统还具备液位查询功能,方便油(气)站管理者更方便的了解站点设备运营情况。

- 1.RAS iot system can be used for oil(gas)station equipment, remotely manage oil(gas) equipment though the Internet
- 2.RAS iot system can transmits real-time the refueling data to the database , which is convenient for managers to view real-time data.
- 3.You can edit the unit price on equipment though RAS iot system
- 4.You can access the database Via 4G, connect the management site on PC or mobile device.
- 5.You can also access the database though wifi, connect the management site on PC or mobile device.
- 6.RAS iot system equipped with a liquid level query function,which makes it easier for managers to understand the status of station equipment operation.

车辆自动识别系统 Automatic Vehicle Identification System

系统构成 System structure



系统运行介绍 System Operation Introduction

安装:电子标签识别传感器安装到加油枪上

防拆电子标签安装到汽车加油口旁

无线数据网关接入加油站控制系统,作为传感器数据通信节点;

Installation:The electronic label recognition sensor is installed on the fueling gun

Anti-tampering electronic label is installed to the side of vehicle refueling port

Wireless data gateway is connected to the control system of the gas station as the sensor data communication node;

操作:电子标签识别传感器内置姿态传感器,当检测油枪操作时,自动唤醒:

电子标签识别传感器读取固定在汽车加油口附近的防拆电子标签信息;

电子标签识别传感器将读取的标签信息通过无线数据网关上传到加油站控制系统;

加油站控制系统根据服务器信息确认是否允许汽车加油。

Operation: The electronic tag recognition sensor has a built-in attitude sensor, which automatically wakes up when detecting fuel gun operation;

The electronic tag recognition sensor reads the information of the tamper-proof electronic tag fixed near the vehicle's fuel filler;

The electronic tag recognition sensor uploads read tag info to the gas station control system via a wireless data gateway.

The gas station control system confirms whether to allow fueling for the vehicle based on server information.

使用介绍 How To Use

1.插入加油卡;

2.加油机传输加油卡的信息(例如加油卡号或用户信息)到加油机后台控制系统;

3.插入并唤醒RFID识别传感器,读取并验证车辆标签的详细信息(如身份证号码);

4.车辆标签信息在验证过程中传输到加油站后台控制系统;

5.当车辆和加油枪间的无线通信成功时,开始加油

6.加油完成后,提枪、挂枪到加油机上。

1. Insert the fuel card!

2. The fuel dispenser transmits the fuel card information (e.g. number or user information) to the back-end control system.

3. Insert and wake up the RFID identification sensor to access and verify the vehicle tag details (e.g. ID number).

4. Vehicle tag information is transmitted to the back-end control system during the verification process.

5. When the wireless communication between the vehicle and the refueling gun is successful, refueling will start.

6. After the refueling is completed, the gun is lifted and hooked up to the fuel dispenser.

车载加油机 WDCF Fuel Tank Truck Type Fuel Dispenser



可带GPRS功能和手机联网
可接受定制
Can add GPRS function , connect with mobile phone to check data and set unit price anytime anywhere
Can do OEM as required

规格 Specification

组合泵 Combination pump+流量计 Flowmeter+防爆电机 EX motor
只带流量计 (卡车自带驱动) Flowmeter only with truck drive dircetly
电动油桶泵 Electric transfer pump+直联电机 Motor+流量计 Flowmeter
电动油桶泵 Electric transfer pump+直联电机 Motor+涡轮流量计 Turbine flowmeter

主要技术参数 Technical Specification	
适应温度 Adapt temperature	-40℃~+55℃
相对湿度 Relative humidity	≤95%
气压 Air pressure	86~106KPa
电压 Voltage	AC220V±20%√ AC380V±20% AC110V±20%
频率 Frequency	(50±1) HZ√ (60±1) HZ
单价设定范围 Unit price setting range	0~9999,0~999999(可变changeable)
单程 Single range	1~9999.99 ,1~999999.99(可变changeable)
累计范围 Accumulative range	0~9999999999.99

车载加油机 WDCF Fuel Tank Truck Type Fuel Dispenser



WDCF-222

产品功能 Product Features

电子校准

锁定泵的功能

加油限时功能

具有锁机功能

具有金额整停功能

Electronic Calibration.

Locking pump function

Fueling time limit function

Lock machine function

Can set the decimal point for the display, so can be used in many country with different currency rate.

Can choose 7 digits for electromagnetic counter or 9 digits for Mechanical totalizer counter.

Leaves the communication ports, so it can communicate with the gas station management system.

Option GPRS function , connect with mobile phone to check data and set unit price anytime anywhere

可带太阳能功能

可带触摸屏

可带手摇功能

可带多媒体

可接受定制

Option solar power function

Option touch screen

Can add handshake function

Option media

可选配音音报数及打印输出功能

具有小数点移位功能, 适用于不同国家货币要求

可选配机械累计计数器

留有通讯口, 可与油站管理系统连接

可带GPRS功能和手机联网

Can do OEM as required

Integer number stop function

Optional voice reporting and printout functions

主要技术参数 Technical Specification

适应温度 Working temperature

-40℃~+55℃

相对湿度 Relative humidity

≤95%

大气压力 Air pressure

86~106KPa

电压 Voltage

AC220V±20% 或 AC380V±20%

频率 Frequency

(50±1)HZ√ (60±1)HZ

单次计数范围 Single range

1~9999.99 ,1~999999.99(Changeable可变)

班累计数范围 Range of cumulative number of classes

0~99999999

单价设定范围 Unit price setting range

0~9999,0~999999(Changeable可变)

总累计数范围 Accumulative range

0~9999999999.99

电磁阀设置范围 Solenoid valve turn off setting range

0~0.99L

枪数 Nozzle No.

1把~10把(可定制) From1~10(OEM)

泵类型 Pump type

自吸泵/潜油泵 Suction pump/submersible pump

车载加油机 WDCF Fuel Tank Truck Type Fuel Dispenser



WDCF-WIFI



WDCF-CZ



WDCF-CZ

产品功能 Product Features

电子校准

锁定泵的功能

加油限时功能

具有锁机功能

具有金额整停功能

Electronic Calibration.

Locking pump function

Fueling time limit function

Lock machine function

Can set the decimal point for the display, so can be used in many country with different currency rate.

Can choose 7 digits for electromagnetic counter or 9 digits for Mechanical totalizer counter.

Leaves the communication ports, so it can communicate with the gas station management system.

Option GPRS function , connect with mobile phone to check data and set unit price anytime anywhere

可带太阳能功能

可带触摸屏

可带手摇功能

可带多媒体

可接受定制

Option solar power function

Option touch screen

Can add handshake function

Option media

可选语音报数及打印输出功能

具有小数点移位功能, 适用于不同国家货币要求

可选配机械累计计数器

留有通讯口, 可与油站管理系统连接

可带GPRS功能和手机联网

Can do OEM as required

Integer number stop function

Optional voice reporting and printout functions

主要技术参数 Technical Specification

适应温度 Working temperature

-40℃~+55℃

相对湿度 Relative humidity

≤95%

大气压力 Air pressure

86~106KPa

电压 Voltage

AC220V±20% 或 AC380V±20%

频率 Frequency

(50±1)HZ√ (60±1)HZ

单次计数范围 Single range

1~9999.99 ,1~999999.99(Changeable可变)

班累计数范围 Range of cumulative number of classes

0~99999999

单价设定范围 Unit price setting range

0~9999,0~999999(Changeable可变)

总累计数范围 Accumulative range

0~9999999999.99

电磁阀设置范围 Solenoid valve turn off setting range

0~0.99L

枪数 Nozzle No.

1把~10把 (可定制) From1~10 (OEM)

泵类型 Pump type

自吸泵/潜油泵 Suction pump/submersible pump

加油机系列 Fuel Dispenser

Welldone 汇洋能源

WDAF



WDLF



WDCF



WDDF



WDEF



WDGF1



WDAF



WDAF-1



WDAF



WDOF



WDEF



WDEFMC 电子式移动加油车 Electronic mobile dispenser



适用 Application

燃油输送车、船队加油、润滑油、航空加油, 石油、化学运输、汽油、生物燃料、溶剂等等。
Fuel oil delivery truck, Fleet refueling, Lube oil, Aviation refuelers, Transport of Petro Chemicals, gasoline, biofuels, solvents and so on.

产品功能 Product Features

防爆电磁阀的进油法兰是4个孔, 直径是 $\Phi 18/\Phi 125$.
能与各种传感器相匹配, 实现高精度大流量的测量.
选择分段流量补偿和温度补偿来提高测量精度.
控制随时加油和预置加油.

与打印机相匹配, 打印交易记录.
自动调节仪表功能.
通过通讯箱连接到管理系统.

The oil inlet flange of the Explosion-proof solenoid valve is 4 holes, $\Phi 18/\Phi 125$.
It can matches with the variety pulsers to achieve the measurement of high-precision large flow.
Select segmented flow compensation and temperature compensation to improve measurement accuracy.
It can achieve the control for the readily refueling and preset refueling.
It can match with the printer, print the transaction records.
Automatically adjust function of meter.
Can connect to management system through communication box.

主要技术参数 Technical Specification	
工作电压 Working Voltage	AC220V $\pm$ 20%OC12V,DC24V
工作温度 Working Temperature	-20°C~+55°C
工作湿度 Working Humidity degree	$\leq$ 95%
单累计计数范围 Single Totalizing Count range	0~999999
总计计数范围 General Totalizing Count range	与不同直径流量计工作时流量是50~2000 L/min. Flow rate 50~2000L/minute when working with different diameter flow meter.
测量精度 Measurement precision	$\leq$ 0.1%
流量计尺寸 Flowmeter size	2", 3", 4", 6"

WDMF 移动加油车 WDMD mobile fuel unit



机械式移动加油车 Mechanical Mobile Dispenser
CE ATEX Approval



电子式移动加油车 Electronic Mobile Dispenser
CE ATEX Approval

概论 Main Features

WDMD系列移动加油车, 集成了大流量的流量计、泵、油管、机械计数器或电子控制系统、脉冲输出等、用于船舶、大型运输工具、大巴、载重卡车、火车、军用车辆、飞机加油、具有流量大、使用便捷、可靠耐用等特点. 产品可根据客户需求, 配置电子式计数器、机械预置式计数器、油管、油管转盘 (或电动油管转盘), 加油枪、快速接头等.

WDMD Series Mobile Fuel Unit, containing a large range flow Flowmeter, Pump, Pipe, Mechanical Counter or Electronic Control Systems and Pulse output etc, is applied to ship, public transportation vehicle, big bus, truck, train, military vehicle, aircraft, with advantage of high flow rate, convenience, long working life, etc. can be customized according to users' requirements, electronic counter, mechanical preset counter, tubing, tubing dial (or motor-driven tubing dial), nozzle, fast coupling, etc., are available for Mobile Fuel Unit.

主要技术参数 Technical Specification	
流量计尺寸 Flowmeter size	2", 3", 4", 6"
泵尺寸 Pump size	2", 3", 4", 6"
驱动方式 Drive type	防爆电机 Explosion proof motor 柴油电机 Disel engine
管子 Hose	10米 meter 可定制 Can do OEM
油枪 Nozzle	1.5", 2" Automatic Nozzle 自封油枪 3", 4", 6" Hose coupling 大尺寸需配快速接头



适用 Application

燃油输送车、船队加油、润滑油、航空加油, 石油、化学运输、汽油、生物燃料、溶剂等等。
Fuel oil delivery truck, Fleet refueling, Lube oil, Aviation refuelers, Transport of Petro Chemicals, gasoline, biofuels, solvents and so on.

特点特征 Advantage

卓越的无极微调装置(磨损补偿装置),对流量计进行正负校准 Stepless adjustment mechanism enables precise micro-adjustment.
大量程范围内的高精度和高重复性;恒定流量时超高精度 Accurate and repeatable across wide flow range; accurate at constant flow.
低维护,低磨损,长寿命 Low maintenance, no metal contact in measuring chamber, long service life.
压力损失小,真正的重力流量计 Low pressure loss, a true gravity flowmeter
计量精度不受温度、压力、粘稠度变化影响 Accuracy regardless of pressure fluctuations, temperature variation, viscosity
铝、铸铁、不锈钢可供选择 Choice of aluminum, cast iron and stainless steel materials of construction

主要技术参数 Technical Specification	
流量计尺寸 Flowmeter size	2", 3", 4", 6"
泵尺寸 Pump size	2", 3", 4", 6"
驱动方式 Drive type	防爆电机 Explosion proof motor 柴油电机 Disel engine
管子 Hose	10米 meter 可定制 Can do OEM
油枪 Nozzle	1.5", 2" Automatic Nozzle 自封油枪 3", 4", 6" Hose coupling 大尺寸需配快速接头



Vertical type explosion proof fuel mini skid with tank

立式加油机小撬

CE / ATEX APPROVAL



立式加油机小撬

Vertical Type Explosion Proof Fuel Mini Skid With Tank



如果您需要其他罐容量或规格,我们可以为您代工 If you need other tank capacity or specification ,we can do OEM for you

可以选择是否增加额外配置Extra Specification For Design Can Be Chosen

LED广告栏、TV多媒体、不锈钢立柱、IC卡、打印机、紧急按钮、累计计数器、安全球等等。(可以根据要求,特别定制)

LED Advertisement Line,TV Medium,Stainless Steel Column, IC Card ,Printer, Emergency Button ,Totalizer, Safety Ball ,Etc.(If you have other required ,we can do OEM for you)

可以选择是否增加额外功能Extra Function Can Be Chosen

GPRS功能(可连接手机3G、4G、5G网络,可查看任何数据,也可随时随地设置单价)

太阳能电源和手摇泵(机器可以在没有电源的情况下工作)

ATG(液位仪)系统(可以检查油箱内的数据)

GPRS: Connect to mobile via 3G/4G/5G, check data & set unit price anywhere, anytime.

Solar Power Supply & Hand Shake Pump(The Machine Can Work Under No Electricity Supply)

ATG(Oil Tank Gauge) System(You Can Check Any Data Inside Tank)

外型种类Design of skid

卧式 Horizontal Type 立式 Vertical Type 大罐型 Big Tank Type 其它定制款 Other OEM Type

主要技术参数 Technical Specification

证书 Certificate	ISO、CE、ATEX、防爆认证 Explosion Proof APPROVAL
规格 Standard Specification	防爆, 它适用于不同种类的燃料, 如:汽油、柴油、煤油等 Explosion proof(it fit for different kinds of fuel,like:petrol,diesel,kerosene,etc.)
流量 Flow Rate	60L/min
电压 Volt	220V/110AC,12V/24V DC
油箱容量 Tank Capacity	100L~ 6000L (可根据需求定制 Can do OEM)
油枪数量 Nozzle	单枪, 双枪, 三枪, 四枪 single , double ,three,four nozzles(for choose)
油品数量 Product	1油品, 2油品, 3油品, 4油品 (可以在油箱内装不同燃油的种类) One ,two ,three ,four product (for choose,you can inside tank different kinds of fuel)

立式加油机小撬

Vertical Type Explosion Proof Fuel Mini Skid With Tank



如果您需要其他罐容量或规格,我们可以为您代工 If you need other tank capacity or specification ,we can do OEM for you

可以选择是否增加额外配置extra Specification For Design Can Be Chosen

LED广告栏、TV多媒体、不锈钢立柱、IC卡、打印机、紧急按钮、累计计数器、安全球等等。(可以根据要求,特别定制)

LED Advertisement Line,TV Medium,Stainless Steel Column, IC Card ,Printer, Emergency Button ,Totalizer, Safety Ball ,Etc.(If you have other required ,we can do OEM for you)

可以选择是否增加额外功能extra Function Can Be Chosen

GPRS功能(可连接手机3G、4G、5G网络,可查看任何数据,也可随时随地设置单价)

太阳能电源和手摇泵(机器可以在没有电源的情况下工作)

ATG(液位仪)系统(可以检查油箱内的数据)

GPRS: Connect to mobile via 3G/4G/5G, check data & set unit price anywhere, anytime.

Solar Power Supply & Hand Shake Pump(The Machine Can Work Under No Electricity Supply)

ATG(Oil Tank Gauge) System(You Can Check Any Data Inside Tank)

外型种类Design of skid

卧式 Horizontal Type 立式 Vertical Type 大罐型 Big Tank Type 其它定制款 Other OEM Type

主要技术参数 Technical Specification

证书 Certificate	ISO、CE、ATEX、防爆认证 Explosion Proof APPROVAL
规格 Standard Specification	防爆, 它适用于不同种类的燃料, 如:汽油、柴油、煤油等 Explosion proof(it fit for different kinds of fuel,like:petrol,diesel,kerosene,etc.)
流量 Flow Rate	60L/min
电压 Volt	220V/110AC,12V/24V DC
油箱容量 Tank Capacity	100L~ 6000L (可根据需求定制 Can do OEM)
油枪数量 Nozzle	单枪, 双枪, 三枪, 四枪 single , double ,three,four nozzles(for choose)
油品数量 Product	1油品, 2油品, 3油品, 4油品 (可以在油箱内装不同燃油的种类) One ,two ,three ,four product (for choose,you can inside tank different kinds of fuel)

卧室加油机小撬

Horizontal Type Explosion Proof Fuel Mini Skid With Tank



如果您需要其他罐容量或规格,我们可以为您代工 If you need other tank capacity or specification ,we can do OEM for you

可以选择是否增加额外配置extra Specification For Design Can Be Chosen

LED广告栏、TV多媒体、不锈钢立柱、IC卡、打印机、紧急按钮、累计计数器、安全球等等。(可以根据要求,特别定制)

LED Advertisement Line,TV Medium,Stainless Steel Column, IC Card ,Printer, Emergency Button ,Totalizer, Safety Ball ,Etc.(If you have other required ,we can do OEM for you)

可以选择是否增加额外功能extra Function Can Be Chosen

GPRS功能(可连接手机3G、4G、5G网络,可查看任何数据,也可随时随地设置单价)

太阳能电源和手摇泵(机器可以在没有电源的情况下工作)

ATG(液位仪)系统(可以检查油箱内的数据)

GPRS: Connect to mobile via 3G/4G/5G, check data & set unit price anywhere, anytime.

Solar Power Supply & Hand Shake Pump(The Machine Can Work Under No Electricity Supply)

ATG(Oil Tank Gauge) System(You Can Check Any Data Inside Tank)

外型种类Design of skid

卧式 Horizontal Type 立式 Vertical Type 大罐型 Big Tank Type 其它定制款 Other OEM Type

主要技术参数 Technical Specification

证书 Certificate	ISO、CE、ATEX、防爆认证 Explosion Proof APPROVAL
规格 Standard Specification	防爆, 它适用于不同种类的燃料, 如:汽油、柴油、煤油等 Explosion proof(it fit for different kinds of fuel,like:petrol,diesel,kerosene,etc.)
流量 Flow Rate	60L/min
电压 Volt	220V/110AC,12V/24V DC
油箱容量 Tank Capacity	100L~ 6000L (可根据需求定制 Can do OEM)
油枪数量 Nozzle	单枪, 双枪, 三枪, 四枪 single , double ,three,four nozzles(for choose)
油品数量 Product	1油品, 2油品, 3油品, 4油品 (可以在油箱内装不同燃油的种类) One ,two ,three ,four product (for choose,you can inside tank different kinds of fuel)

大容量加油机小撬

Big Tank Type Explosion Proof Fuel Mini Skid With Tank



大容量加油机小撬

Big Tank Type Explosion Proof Fuel Mini Skid With Tank



如果您需要其他罐容量或规格,我们可以为您代工 If you need other tank capacity or specification ,we can do OEM for you

可以选择是否增加额外配置extra Specification For Design Can Be Chosen

LED广告栏、TV多媒体、不锈钢立柱、IC卡、打印机、紧急按钮、累计计数器、安全球等等。(可以根据要求,特别定制)

LED Advertisement Line,TV Medium,Stainless Steel Column, IC Card ,Printer, Emergency Button ,Totalizer, Safety Ball ,Etc.(If you have other required ,we can do OEM for you)

可以选择是否增加额外功能extra Function Can Be Chosen

GPRS功能(可连接手机3G、4G、5G网络,可查看任何数据,也可随时随地设置单价)

太阳能电源和手摇泵(机器可以在没有电源的情况下工作)

ATG(液位仪)系统(可以检查油箱内的数据)

GPRS: Connect to mobile via 3G/4G/5G, check data & set unit price anywhere, anytime.

Solar Power Supply & Hand Shake Pump(The Machine Can Work Under No Electricity Supply)

ATG(Oil Tank Gauge) System(You Can Check Any Data Inside Tank)

外型种类Design of skid

卧式 Horizontal Type 立式 Vertical Type 大罐型 Big Tank Type 其它定制款 Other OEM Type

主要技术参数 Technical Specification	
证书 Certificate	ISO、CE、ATEX、防爆认证 Explosion Proof APPROVAL
规格 Standard Specification	防爆, 它适用于不同种类的燃料, 如:汽油、柴油、煤油等 Explosion proof(it fit for different kinds of fuel,like:petrol,diesel,kerosene,etc.)
流量 Flow Rate	60L/min
电压 Volt	220V/110AC,12V/24V DC
油箱容量 Tank Capacity	100L~ 6000L (可根据需求定制 Can do OEM)
油枪数量 Nozzle	单枪, 双枪, 三枪, 四枪 single , double ,three,four nozzles(for choose)
油品数量 Product	1油品, 2油品, 3油品, 4油品 (可以在油箱内装不同燃油的种类) One ,two ,three ,four product (for choose,you can inside tank different kinds of fuel)

大容量加油机小撬

Big Tank Type Explosion Proof Fuel Mini Skid With Tank



如果您需要其他罐容量或规格,我们可以为您代工 If you need other tank capacity or specification ,we can do OEM for you

可以选择是否增加额外配置Extra Specification For Design Can Be Chosen

LED广告栏、TV多媒体、不锈钢立柱、IC卡、打印机、紧急按钮、累计计数器、安全球等等。(可以根据要求,特别定制)

LED Advertisement Line,TV Medium,Stainless Steel Column, IC Card ,Printer, Emergency Button ,Totalizer, Safety Ball ,Etc.(If you have other required ,we can do OEM for you)

可以选择是否增加额外功能Extra Function Can Be Chosen

GPRS功能(可连接手机3G、4G、5G网络,可查看任何数据,也可随时随地设置单价)

太阳能电源和手摇泵(机器可以在没有电源的情况下工作)

ATG(液位仪)系统(可以检查油箱内的数据)

GPRS: Connect to mobile via 3G/4G/5G, check data & set unit price anywhere, anytime.

Solar Power Supply & Hand Shake Pump(The Machine Can Work Under No Electricity Supply)

ATG(Oil Tank Gauge) System(You Can Check Any Data Inside Tank)

外型种类Design of skid

卧式 Horizontal Type 立式 Vertical Type 大罐型 Big Tank Type 其它定制款 Other OEM Type

主要技术参数 Technical Specification	
证书 Certificate	ISO、CE、ATEX、防爆认证 Explosion Proof APPROVAL
规格 Standard Specification	防爆, 它适用于不同种类的燃料, 如:汽油、柴油、煤油等 Explosion proof(it fit for different kinds of fuel,like:petrol,diesel,kerosene,etc.)
流量 Flow Rate	60L/min
电压 Volt	220V/110AC,12V/24V DC
油箱容量 Tank Capacity	100L~ 6000L (可根据需求定制 Can do OEM)
油枪数量 Nozzle	单枪, 双枪, 三枪, 四枪 single , double ,three,four nozzles(for choose)
油品数量 Product	1油品, 2油品, 3油品, 4油品 (可以在油箱内装不同燃油的种类) One ,two ,three ,four product (for choose,you can inside tank different kinds of fuel)



如果您需要其他罐容量或规格,我们可以为您代工 If you need other tank capacity or specification ,we can do OEM for you

可以选择是否增加额外配置 Extra Specification For Design Can Be Chosen

LED广告栏、TV多媒体、不锈钢立柱、IC卡、打印机、紧急按钮、累计计数器、安全球等等。(可以根据要求,特别定制)

LED Advertisement Line,TV Medium,Stainless Steel Column, IC Card ,Printer, Emergency Button ,Totalizer, Safety Ball ,Etc.(If you have other required ,we can do OEM for you)

可以选择是否增加额外功能 Extra Function Can Be Chosen

GPRS功能(可连接手机3G、4G、5G网络,可查看任何数据,也可随时随地设置单价)

太阳能电源和手摇泵(机器可以在没有电源的情况下工作)

ATG(液位仪)系统(可以检查油箱内的数据)

GPRS: Connect to mobile via 3G/4G/5G, check data & set unit price anywhere, anytime.

Solar Power Supply & Hand Shake Pump(The Machine Can Work Under No Electricity Supply)

ATG(Oil Tank Gauge) System(You Can Check Any Data Inside Tank)

外型种类Design of skid

卧式 Horizontal Type 立式 Vertical Type 大罐型 Big Tank Type 其它定制款 Other OEM Type

主要技术参数 Technical Specification

证书 Certificate	ISO、CE、ATEX、防爆认证 Explosion Proof APPROVAL
规格 Standard Specification	防爆, 它适用于不同种类的燃料, 如:汽油、柴油、煤油等 Explosion proof(it fit for different kinds of fuel,like:petrol,diesel,kerosene,etc.)
流量 Flow Rate	60L/min
电压 Volt	220V/110AC,12V/24V DC
油箱容量 Tank Capacity	100L~ 6000L (可根据需求定制 Can do OEM)
油枪数量 Nozzle	单枪, 双枪, 三枪, 四枪 single , double ,three,four nozzles(for choose)
油品数量 Product	1油品, 2油品, 3油品, 4油品 (可以在油箱内装不同燃油的种类) One ,two ,three ,four product (for choose,you can inside tank different kinds of fuel)

加油机控制器 Fuel Dispenser Controller



产品功能 Product Features

具有锁机功能
可带手摇功能
具有金额整停功能
可带多媒体

Electronic Calibration.
Function of locking pump.
Fueling time limit function.

Can set the decimal point for the display, so can be used in many country with different currency rate.

Can choose 7 digits for electromagnetic counter or 9 digits for Mechanical totalizer counter.

Leaves the communication ports, so it can communicate with the gas station management system.

Can add GPRS function ,connect with mobile phone to check data and set unit price anytime anywhere

可带GPRS功能和手机联网
可选配机械累计计数器
可带太阳能功能
可选配语音报数及打印输出功能

Screen touch
TV medium
Can add solar power function

可带触摸屏
留有通讯口,可与油站管理系统连接
可接受定制
具有小数点移位功能,适用于不同国家货币要求

Can do OEM as required
Can add handshake function

主要技术参数 Technical Specification	
适应温度 Working temperature	-40℃~+55℃
相对湿度 Relative humidity	≤95%
大气压力 Air pressure	86~106KPa
电压 Voltage	AC220V±20% 或 AC380V±20%
显示屏显示位数 Number of digits displayed on the display	Volume6位, Amount6位, Unitprice4位 (664) Volume8位, Amount8位, Unitprice6位 (886)
单次计数范围 Single range	1~9999.99 ,1~999999.99(Changeable可变)
单价设定范围 Unit price setting range	0~9999,0~999999(Changeable可变)
总累计数范围 Accumulative range	0~9999999999.99
电磁阀设置范围 Solenoid valve turn off setting range	0~0.99L

组合叶片泵 WDPBNT/WDPHIB Vane Pump



WDPBNT



WDPHIB

组合叶片泵,内置油气分离器、溢流阀,具有A/B两种的上盖结构,适合连接不同的管路,具有噪音低、流量大、寿命长等特点

WDPBNT/WDPHIB Vane Pump, built in air separator, by pass valve, filter, is with A and B different top covers for different connecting pipes. With the advantage of low noise, high flow rate, long life service, etc.

主要技术参数 Technical Specification

型号 Model	WDPBNT	WDPHIB
转速 Speed	630RPM	630RPM
流量 Flow Rate	45-65L/min	75-85/Lmin
真空度 Vacuum	0.054MPa	0.054MPa
噪音 Noise	72dB	72dB
工作压力 Working Pressure	1.6-2.0bar	2-2.5bar
包装尺寸 Dimension	35×28×38cm	35×28×38cm
净重 Net weight	15kg	15kg
毛重 Gross weight	16kg	16kg
包装 Package	1pcs/CTN	

齿轮泵 WDPTOK Gear Pump



WDPTOK

WDPTOK 齿轮泵,泵体材料:铸铁,用于汽油、煤油、柴油、乙醇汽油等混合性燃油,分为A型和B型两种不同的进口结构。泵体内置了油气分离器、止回阀、溢流阀、出口阀、进口过滤网。WDPTOK Gear Pump, made by cast iron, is applicable to gasoline, kerosene, diesel and gasohol with A type and B type inlet and Air Eliminator, By pass valve, Check valve, Inlet filter are built in.

主要技术参数 Technical Specification

型号 Model	WDPTOK
转速 Speed	900RPM
流量 Flow Rate	45-55L/min
真空度 Vacuum	≥0.06MPa
噪音 Noise	≤72dB
工作压力 Working Pressure	1.8-2.4bar
包装尺寸 Dimension	43×32×40cm
净重 Net weight	32.5kg
毛重 Gross weight	33.5kg
包装 Package	1pcs/CTN

液位仪 Liquid Level Gauge



WD-ATG



彩色10寸触摸Android大屏

双语音播报、大容量数据存贮

最多16油罐界面显示，工业RS4851200米超远通讯

手机、平板、液位多层互联，远程查看


Color 10-inch touch Android large screen.

Dual voice broadcast and large-capacity data storage.


It can display the interfaces of up to 16 oil tanks, and has industrial RS485 ultra-long-distance communication with a range of 1200 meters.

Multi-level interconnection among mobile phones, tablets and liquid level, allowing for remote viewing.

内置安装

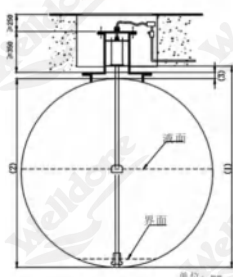

外置安装

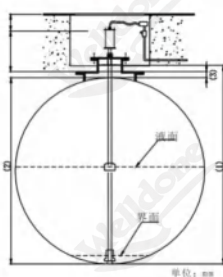

主要技术参数 Technical Specification

量程范围 Measurement range	200mm~7000mm
工作温度 Operating temperature	-40°C~+60°C
输入电压 Input voltage	220VAC±15%
产品功耗 Product power consumption	≤40mA
防护等级 Protection level	IP6+6
防爆标志 Explosion-proof mark	Ex ia II B T4 Ga

WD-T804



主要技术参数 Technical Specification

输入 Input	Universal input(default:4-20mA)
输出 Output	RS485/4-way relay
电源 Supply	AC 220V/50/60HZ
量程 Measurement range	0-1M
供电 Power supply	12-36VDC
精度 Accuracy	0.5%FS

齿轮泵 WDPTAS Gear Pump

WDPTAS 齿轮泵泵体采用铝合金低压铸造;用于汽油、煤油、柴油等混合性燃油泵体内置了油气分离器、止回阀、溢流阀、减压阀,进口过滤网和出口过滤网

WDPTAS Gear Pump is made by low pressure casting aluminum, for pumping gasoline, kerosene, diesel, etc, with built in air eliminator, by pass valve, check valve, inlet & outlet filter.



WDPTAS

主要技术参数 Technical Specification

型号 Model	WDPBNT
转速 Speed	680-980RPM
流量 Flow Rate	45-90L/min
真空度 Vacuum	0.06MPa
噪音 Noise	72dB
工作压力 Working Pressure	1.8-3.0bar
包装尺寸 Dimension	36×32×30cm
净重 Net weight	16kg
毛重 Gross weight	17.5kg
包装 Package	1pcs/CTN

防爆泵 DC12V/24V Explosion-proof Pump



主要技术参数 Technical Specification

型号 Model	DC12V/24V防爆泵
工作电压 Voltage(V)	DC12V or 24V
流量 Flow Rate	30-50L/min

流量计 WDFGIL Flow Meter



WDFGIL

主要技术参数 Technical Specification

型号 Model	WDFGIL
流量 Flow Rate	5-60L/min
每转排量 Discharge Rate Per Revolution	0.473L
最小可调量 Adjustable Minimum Volume	0.04%
精度 Accuracy	±0.2%
重复度 Repeatable Tolerance	±0.07%
包装尺寸 Dimension	46×28×32cm
净重 Net weight	11kg
毛重 Gross weight	12kg
包装 Package	2台/纸箱 2PCS/CTN

流量计 WDFBNT Flow Meter



WDFBNT



WDFBAS1



WDFBAS

机体材料:铝合金

本机结构:不锈钢缸套,四活塞行程外机新颖,机体小,强度高,耐磨性好,计量准确,使用寿命长. WDFBAS流量计内置智能传感器,100脉冲和60脉冲可供选择

Flow meter, is made of alloy aluminum, with construction of stainless steel bush and four pistons positive displacement. Novel appearance, small size, high reliability, good wear ability, precise measure, long life flow meter is built in intelligent pulse, 60 pulses or 100 pulses for option.

主要技术参数 Technical Specification

型号 Model	WDFBAS	WDFBAS1	WDFBNT
流量 Flow Rate	5-90L/min	5-90L/min	5-60L/min
每转排量 Discharge Rate Per Revolution	0.5L	0.5L	0.5L
最小可调量 Adjustable Minimum Volume	0.07%	0.07%	0.05%
精度 Accuracy	±0.2%	±0.2%	±0.2%
重复度 Repeatable Tolerance	±0.07%	±0.07%	±0.07%
包装尺寸 Dimension	50×30×35cm	50×29×32cm	50×29×24cm
净重 Net weight	11kg	10kg	10kg
毛重 Gross weight	12kg	11kg	10.5kg
包装 Package	2台/纸箱 2PCS/CTN		

流量计 WDFBOK Flow Meter



WDFBOK

主要技术参数 Technical Specification

流量 Flow Rate	5-60L/min
每转排量 Discharge Rate Per Revolution	0.5L
最小可调量 Adjustable Minimum Volume	0.11%
精度 Accuracy	±0.2%
重复度 Repeatable Tolerance	±0.07%
包装尺寸 Dimension	30×27×37cm
净重 Net weight	23kg
毛重 Gross weight	27kg
包装 Package	1台/纸箱 1PCS/CTN

大流量流量计 WDFHIB High Flow Flowmeter



WDFHIB

高流量流量计采用先进的技术, 广泛应用于不同的加油机。该产品具有使用寿命长、精度高、结构坚固等优点。它是加油机零件的最佳选择。

High Flow Flowmeter adopts advanced technology, which can be widely used on different fuel dispensers. This product has advantages as long using term, high precision, firm structure etc. It can be the best choice of gasoline dispenser component.

主要技术参数 Technical Specification	
每转排量 Discharge Rate of Each Revolution	1L
轴向旋转方向 Rotary Direction Of Axial	CW
水平方向 Level	256mm
垂直方向 Vertical	254mm
流量范围 Flow Range	5~160L/min
工作压力 Working Pressure	0.12MPa~0.35MPa
精度 Accuracy	±0.2%
重复错误 Repeat Error	≤0.1%
工作寿命 Working Life	≥10000000L

防爆双电流电磁阀 WDF20 Series Solenoid Valve



WDF20A

圆线圈法兰款 Coil type flange

工艺先进, 动作精确可靠, 寿命长。主阀膜片采用进口特制橡胶, 强耐腐蚀, 耐低温-40℃磁路部件采用特种不锈钢磁性材料, 永不生锈或产生剩磁线圈部件采用F级漆包线, 绝缘性能优良
防爆等级: EXD II BT4 当工作压力在0.3-0.4MPa时, 关闭主阀 小流量为3-3.5L/MIN

Precise action, reliable, long service. Diaphragm of main valve has capability of anti-corrosion and resisting -40℃ low temperature. Special stainless steel magnetic material never rusts and generates remanent magnetism Class floop with good insulation

Anti-Explosion Class: EXD II Bt4 When main valve shuts off, work pressure 0.3-0.4MPa, Flow rate is 3-3.5L/min

主要技术参数 Technical Specification		
型号 Model	WDF20A	WDF40
包装尺寸 Dimension	45 × 42 × 18cm	49 × 42 × 15cm
净重 Net weight	20kg	20kg
毛重 Gross weight	21.5kg	18kg
包装 Package	15pc/CTN	10pcs/CTN
公称直径 Diameter	20mm/ 3/4"	40mm/ 1.5"
连接方式 Connection	Flange	Thread M33 × 1.5
流量 Flow rate(L/min)	50	250
工作压力范围 Working pressure(bar)	0.35-4.5Bar	0.35-4.5Bar
工作电压 Voltage(V)	AC220V 50HZ DC24V/12V	AC220V 50HZ DC24V/12V
环境温度 Ambient Temperature(°C)	-40℃~55℃	-40℃~55℃
介质温度 Prdout temperature(°C)	-40℃~65℃	-40℃~65℃



WDF40

大流量 Big flow

防爆双电流电磁阀 Series Solenoid Valve



WDF20FL

法兰款转螺纹款 Flange to threaded



WDT20SS

不锈钢款 Stainless steel



WDOT20

外螺纹款 Outer thread

工艺先进, 动作精确可靠, 寿命长. 主阀膜片采用进口特制橡胶, 强耐腐蚀, 耐低温-40℃. 磁路部件采用特种不锈钢磁性材料, 永不生锈或产生剩磁. 线圈部件采用F级漆包线, 绝缘性能优良.

防爆等级: EXD II BT4. 当工作压力在0.3-0.4MPa时, 关闭主阀. 小流量为3-3.5L/MIN.

Precise action, reliable, long service. Diaphragm of main valve has capability of anti-corrosion and resisting -40°C low temperature.

Special stainless steel magnetic material never rusts and generates remanent magnetism. Class IIB with good insulation.

Anti-Explosion Class: EXD II BT4. When main valve shuts off, work pressure 0.3-0.4MPa, flow rate is 3-3.5L/min.

使用条件 Using condition

高度 Height: ≤2000m

温度 Temperature: -35°C ~ +55°C

湿度 Humidity: ≤95% (+25°C)

没有震动和撞击的地方 no shaking and impact place.

在额定电压85%~110%范围内灵活, 可正常关闭. Flexible in the rated volt 85%~110% range, it can shut off normally.

主要技术参数 Technical Specification					
直径Diameter	20mm	25mm	40mm	中等Medium	汽油、柴油、煤油Petrol,diesel,kerosene
大流量Big flow L/min	≥50	≥100	≥250		
小流量Small flow L/min	2.5~5.5	3.5~6.5	3.5~6.5	额定电压 Rated voltage	AC220V/50HZ AC230V/60HZ AC110V/50HZ AC115V/60HZ DC24V
				额定功率Rated power	2×7W
压力Pressure	0.35MPa			温度Temperature	-35°C~-+55°C

WDAN11A(D) Automatic Nozzle



WDAN11A(D)自封油枪枪体材料为铸铝在设计时充分考虑到顾客的需求,具有小巧,轻便,易用,可靠性高,耐用等特点。

WDAN11A(D)Automatic Nozzles are made of alloy aluminum and,designed with today' s customer in mind.Small,trim,light weight,easy and convenient to use.

WDAN11A1 Automatic Nozzle



WDAN11A1 油枪是WDAN11A1油枪改进型油枪。在设计时充分考虑到农场和家庭用户的要求,具有流量大,方便悬挂等特点,更加适合配套电动油泵在农场和家庭使用。

WDAN11A1 Automatic nozzle is improved from WDAN11A1 nozzle, designed with Farm& home customers in Mind, with advantage of high flow rate, easy hung.it is idea nozzle for electric transfer pump on farm and home use.

WDAN11B Automatic Nozzle



WDAN11B自封油枪流量控制准确, 专为预付款式自助服务和卡式设计, 能防止溢油、盗油。当泵油系统加压到一定程度, 油枪才可以开启;当没有压力时, 油枪自动关闭。

WDAN11B Automatic Nozzles are designed specially for self-service pre-pay of card-lock system to help prevent gasoline spills.The WDAN11B can not be opened until the pumping system is pressurized and closes automatically when the pressure is removed. This means the WDAN11B is closed when placed back to the dispenser. Accurate flow control allows your customers to top off their tank to the exact amount they want,and it's easy to stop gasoline flow precisely.

WDAN120Automatic Nozzle



大流量,适用于大货车,巴士等加油低成本,长寿命,经久耐用能帮助你提高工作效率,增加利润。

Heavt-duty high -flow nozzle for fueling to truck,bus Low cost,long life and durability High flow nozzle can help increase your productivity,sales and profits.

主要技术参数 Technical Specification

型号 Model	WDAN11A(D)	WDAN11A1	WDAN11B	WDAN120
进口 Inlet	BSPT/NPT 3/4"	BSPT/NPT 3/4"	BSPT/NPT 3/4"	BSPT/NPT 1"
枪嘴外径 Diameter of spout	13/16"&15/16"	21MM	13/16"&15/16"	17/16"&19/16"
枪套颜色 Color of insulator	红/绿/蓝/黄/黑 red/green/blue/yellow/black 可定制OEM			
包装尺寸 Dimension	42×34×37cm	42×34×40cm		
净重 Net weight	12kg	12kg	12kg	15kg
毛重 Gross weight	13kg	13kg	13kg	16kg
包装 Package	10pcs/CTN			

WDTN Automatic Nozzle



枪嘴一体化设计,避免了在长期加油中枪嘴松动,出现的漏油主阀采用二级密封,避免油压过高开枪困难,加油时,一只手就可以完成三档控制,得心应手
whole Spout to avoid leakage after service long time.The main valve is sealed in two layers to avoid being difficult to run the nozzles when working pressure is too high.
The nozzle can be controlled in three grades only with one hand.

主要技术参数 Technical Specification

进口 Inlet	BSPT/NPT 3/4"
枪嘴外径 Diameter of spout	13/16"&15/16"
枪套颜色 Color of insulator	红/绿/蓝/黄/黑 red/green/blue/yellow/black 可定制OEM
包装尺寸 Dimension	42×34×40cm
净重 Net weight	12kg
毛重 Gross weight	13kg
包装 Package	10pcs/CTN

WDZA13A/ WDZA120 Automatic Nozzle

WDZA13A/ WDZA120自封油枪结构更加紧凑,外观小巧美观,压力损失少,流量大;准确的流量控制,用户可以按照他们需要精确加油。
WDZA13B油枪产品可靠、重量轻、小巧,密封区采用一体式结构,降低了工作压力,减少漏油的机率,具有枪嘴水平自动关枪功能,无压自封功能供选择

Compact structure,cute appearance,low pressure loss and high flow rate .Accurate flow control allows your customers to fuel their tank to the exact amount they want,and it's easy to stop gasoline flow precisely.Reliable products,slim design,light weight and customer friendly .Integrated construction in the seal reduces working pressure and avoids leakage with function of automatic shut-off when spout points to horizon .The function of automatic shut-off when system pressure is removed for option.



WDZA13A



WDZA13B



WDZA120

主要技术参数 Technical Specification

型号 Model	WDZA13A/WDZA13B	WDZA120
进口 Inlet	BSPT/NPT 3/4"or 1"	BSPT/NPT 1"
枪嘴外径 Diameter of spout	13/16"&15/16"	19/16"
枪套颜色 Color of insulator	红/绿/蓝/黄/黑 red/green/blue/yellow/black 可定制OEM	
包装尺寸 Dimension	42×34×37cm	42×34×40cm
净重 Net weight	12kg	15kg
毛重 Gross weight	13kg	16kg
包装 Package	10pcs/CTN	

油枪 Nozzle

大流量自封加油枪 High-flow self-sealing fuel gun



WDAN40



WDAN50

主要技术参数 Technical Specification		
型号 Model	WDAN40	WDAN50
进口 Inlet	BSPT/NPT 1.5"	BSPT/NPT 1.5"or 2"
枪嘴外径 Diamenter of spout	38mm	42mm
流量 Flow rate	260L/min	300L/min
包装尺寸 Dimension	37×37×57cm	46×37×40cm
净重 Net weight	23kg	16kg
毛重 Gross weight	25kg	17kg
包装 Package	10pcs/CTN	5pcs/CTN

自封加油枪 WDAN60



自封加油枪内置保护斜阀，在枪嘴朝上时，自动关闭不出油，在水平横放才会出油，安全便捷
 吸气口远离枪嘴出口，避免吸入油，使液阻增大，提高油气回收率

The self-sealing fuel gun has a built-in protective inclined valve. It shuts off automatically when the nozzle is upward and dispenses fuel only when placed horizontally. Its air intake is away from the fuel outlet to avoid fuel inhalation, increase liquid resistance and enhance oil and gas recovery rate.

主要技术参数 Technical Specification	
型号 Model	WDAN60
进口 Inlet	BSPF3/4"、BSPF1"、BSPT3/4"、BSPT1"、NPT3/4"、NPT1"
出口 Outlet	15/16"
流量范围 Flow rate	0~60L/min
工作压力 Work Pressure	0.18~0.22Mpa
包装 Package	20pcs/carton
尺寸 Dimension	61.5×41.5×37.5cm
总重量 Gross Weight	28kg
净重 Net weight	24kg

WDANSS 不锈钢油枪

WDANSS 不锈钢油枪，全不锈钢设计，用于加注尿素。
 WDANSS Stainless steel nozzle,made by stainless steel,designed for Adblue Urea



油枪 Nozzle



塑料尿素加注枪 Plastic urea filling gun



WDAN20



WDAN20A

主要技术参数 Technical Specification		
型号 Model	WDAN40	WDAN50
进口 Inlet	Φ19	Φ19
流量 Flow rate	37L/min	37L/min
净重 Net weight	0.2kg	0.2kg

WDJM Nozzle



流量计油枪在手动油枪的基础上安装了带LCD显示的电子椭圆齿轮流量计,具有精度高达±0.5%、重量轻、使用方便、5位数单次加油量和8位不可复位总累计等优点。
WDJM Meter Nozzle is installed electronic oval gear meter with LCD display on base of manual nozzle, with advantage of high accuracy up to ±0.5%, low weight, easy use and 5 digital Sub-total and 8 digital Non-resettable totalizer, etc.

主要技术参数 Technical Specification	
流量 Flow Rate	50-60L/min
入口 Inlet	BSP or NPT
喷嘴直径 Diameter of Spout	13/16"
精度 Accuracy	±0.5%
重复性 Repeatability	0.2%

WDJYQ Oil Nozzle



WDJYQ

WDJYQ-1

WDJYQ 机油枪与椭圆齿轮流量计相结合,采用铝合金枪体,内置平衡阀来降低对扳机的压力,自带旋转接头
WDJYQ oil nozzle is easily combined with Oval gear meter to measuring the dispensing of oil, with the construction of aluminum body swivel, a in-built balanced valve.

主要技术参数 Technical Specification	
出口 Outlet	BSP 1/2"
工作压力 Working Pressure	0.7MPa
最大流量 Max. Flow Rate	15L/min
最大工作压力 Max. Working Pressure	10MPa

WDMN Nozzle



WDMN测量油枪通过流量计和油枪连接,适用于测量通过管道的液体(柴油,机油,压力油等)的体积,也适用于汽油和各种轻质油灌装。
WDMN measuring nozzle is connected by flowmeter and nozzle, It is fit for testing the volume of the liquid (diesel, engine oil, pressured oil and so on) which through the pipeline .Also it can fit for petrol and such kind of light oil filling.

自封油枪结构更加紧凑,外观小巧美观,压力损失少,流量大;准确的流量控制,用户可以按照他们需要精确加油;油枪产品可靠、重量轻、小巧,密封区采用一体式结构,降低了工作压力,减少漏油的机率;具有枪嘴水平自动关枪功能,无压自封功能供选择;枪嘴一体化设计,避免了在长期加油中枪嘴松动,出现的漏油;主阀采用二级密封,避免油压过高开枪困难;加油时,一只手就可以完成三档控制,得心应手。

The self-sealing oil gun has more compact structure, small and beautiful appearance, less pressure loss and large flow rate; Accu.rate flow control,users can precisely fuel as they need:The oil gun products are reliable, lightweight and compact, and the sealing zone adopts an integrated structure, which reduces thetheworking pressure and reduces the probability of oil leakage.With the horizontal nozzle automatic closing function, no pressure self-sealing function for choice:Nozzle integrated design, to avoid the nozzle loose in the long-term refueling, oil leakage;The main valve adopts two-stage seal to avoid high oil pressure and difficulty in firing.When refueling, one hand can complete the three gear control, handy.



电子自封计量枪Electronic self-sealing



机械自封计量枪Mechanical self-sealingmetering gun

主要技术参数 Technical Specification		
型号 Model	电子自封计量枪Electronic self-sealing	机械自封计量枪Mechanical self-sealingmetering gun
进口Inlet	BSPF/NPT 1"	BSPF/NPT 3/4"
流量性范围Flow Rate	20-60L/min	20-60L/min
计量范围Measuringrange	1-9999L	1-9999L
材质Material	铝合金Aluminium alloy	铝合金Aluminium alloy
净重NetWeight	1.15kg	1.8kg
包装 Package	10把/纸箱 10PCS/CTN	10把/纸箱 10PCS/CTN



WDPH40



WDHFN

主要技术参数 Technical Specification		
型号 Model	WDPH40	WDHFN
进口Inlet	BSPF/NPT 2"	BSPF/NPT 3/4"
流量性范围Flow Rate	300L/min	40mm
喷口直径Diameter of spout	42mm	35mm
尺寸Dimension	46x34x40cm	54.5x39.5x36.5cm
毛重Gross weight	17kg	19.5kg
净重Net Weight	16kg	18.9kg
包装 Package	5把/纸箱 5PCS/CTN	10把/纸箱 10PCS/CTN

油枪套 WDNH Nozzze Holder



WDNH50



WDNH50P



WDNH150P



WDNH50B



WDNH60P



WDNH200

主要技术参数 Technical Specification						
型号 Model	WDNH50	WDNH50B	WDNH200	WDNH50P	WDNH60P	WDNH150P
材料 Material	铝 Cast Aluminum			塑料 Reinforced nylon		
包装尺寸 Dimension	45×42×40cm		64×41×45cm	59×43×46cm		64×41×45cm
净重 Net weight	12kg	11kg	12kg	14kg	14kg	14kg
毛重 Gross weight	13kg	12kg	13kg	15kg	15kg	15kg
包装 Package	20pc/CTN		12pc/CTN	20pc/CTN		12pc/CTN

导静电式加油机专用胶管 The hose with wire is special used in fuel dispenser




主要技术参数 Technical Specification

尺寸 Size	1/2'', 3/4'', 1'', 1.5'', 2'', 3'', 4'' Other size as required 尺寸按需定制
颜色 Colours	黑色, 绿色, 蓝色, 黄色, 红色 black, green, blue, yellow, red

传感器 Pulser

主要技术参数 Technical Specification

型号 Model	传感器 Pulser
电压 Voltage	±5DC
包装尺寸 Dimension	42×34×40cm
净重 Net weight	12kg
毛重 Gross weight	13kg
包装 Package	30pcs/CTN

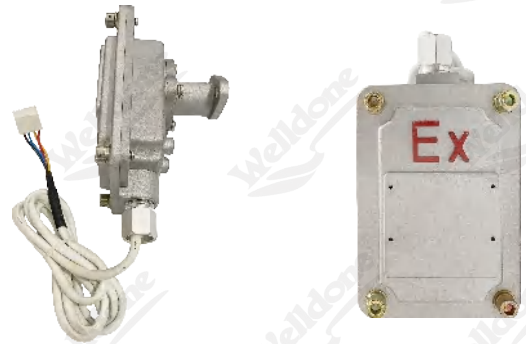

车载加油机过滤器 Filter of vehicle-mounted fuel dispenser.

30微米公称值

仅适用于车用燃油

最大压力50磅力每平方英寸(3.4巴)

30 Micron Nomina

For motor fuels only

Maximum Pressure 50 PS1 3.4 BAR



紧急切断阀 Emergency Shut-off Valve



WDESOVO/WDESOVI

用于汽油、柴油、煤油 Used for gasoline,kerosene,diesel oil,etc.



WDESOVO



WDESOVI

主要技术参数 Technical Specification

工作压力 Working pressure	0.2MPa
脱离速度 Valve closing speed	0.5S
工作温度 Working temperature	-30-55°C
流量范围 Flow range	0-120L/min
提升阀 Poppet valve	Single
进出口螺纹 Inlet & outlet	BSPF/NPT ”
螺纹 Thread	Male/Female
包装尺寸 Dimension	41x35x25cm
净重 Net weight	25kg
毛重 Gross weight	26kg
包装 Package	10pcs/CTN
尺寸 Size	1.5” or 2”

拉断阀 Breakaway valve

用于油管和加油机之间,内置止回阀,一次性使用。
拉力过大时,自动断裂,同时自动关闭,防止燃油外溢。

WDBV1/WDBV2 Breakaway built with check valve are used for connecting the hose and the dispenser.

When the pull is too strong,the breakaway will be broken and closed automatically to avoid the fuel flowing.



WDBV1



WDBV2

主要技术参数 Technical Specification

型号 Model	WDBV1	WDBV2
螺纹 Thread	BSPT/NPT	BSPT/NPT
直径 Diameter	3/4" & 1"	3/4" & 1"
最大拉力 Max.Pull	800-15000N	800-15000N
流量范围 Flowrange	3/4":0-60L/min 1":0-90L/min	3/4":0-60L/min
包装尺寸 Dimension	3/4":27×27×27cm 1":29×29×29cm	29×27×27cm
净重 Net weight	3/4":12kg 1":16kg	13kg
毛重 Gross weight	3/4":13kg 1":17kg	14kg
包装 Package	50pcs/CTN	50pcs/CTN

传感器 WDSS Pulser


60脉冲或100脉冲输出供客户选择,也可以根据客户要求定制输出波形。
60 and 100 pulses available,output signal as required.

主要技术参数 Technical Specification	
电压Voltage	±5DC
包装尺寸 Dimension	42×34×40cm
净重 Net weight	12kg
毛重 Gross weight	13kg
包装 Package	30pcs/CTN




输出波形 Output waveform


模式一 A型 Model-1 A type

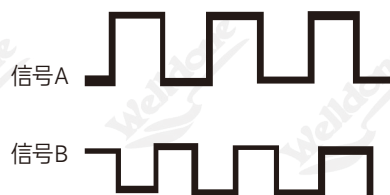


模式二 B型 Model-2 B type

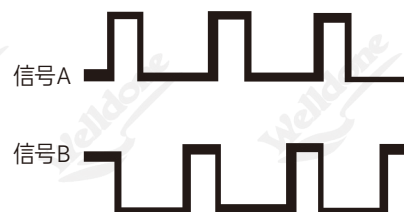

模式三 C型 Model-3 C type

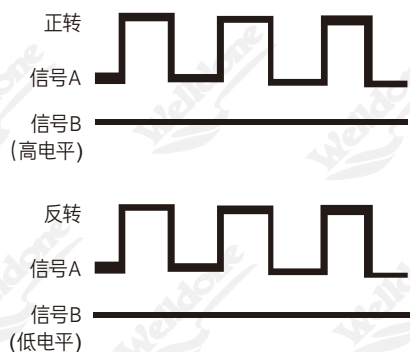

模式四 D型 Model-4 D type

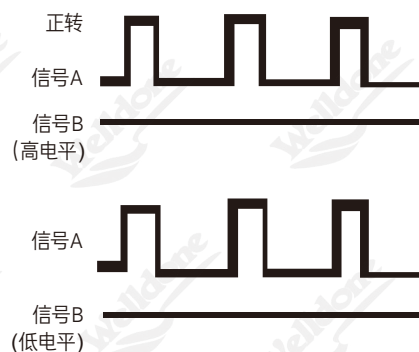

过滤器系列 Filter series



WDF4



WDF4SS



PAPER CORE



SS CORE



WDF4-A



WDF4-F



WDF4-T



WDF4-D

主要技术参数 Technical Specification					
型号 Model	WDF4-A/D 过滤器座Filter Holder	WDF4-T 过滤器座Filter Holder	WDF4-F 过滤器座Filter Holder	WDF4 过滤器Filter	WDF4SS 过滤器Filter
材料 Material	铝Aluminum	铝Aluminum	铝Aluminum	—	—
进口 Inlet	BSPT/NPT 1"	BSPT/NPT 1"	Flange	—	BSPT/NPT 1"
出口 Outlet	BSPT/NPT 1"	BSPT/NPT 1"	Flange	—	BSPT/NPT 1"
过滤网螺纹 Filter thread	UNF1"~12	UNF1.5"~16	UNF1.5"~25	UNF1"~12	—
包装尺寸 Dimension	31×33×23cm	44×50×15cm	44×50×15cm	49×40×30cm	51×25×37cm
净重 Net weight	13kg	13kg	13kg	20kg	17kg
毛重 Gross weight	14kg	14kg	14kg	21kg	18kg
包装 Package	50pcs/CTN	50pcs/CTN	50pcs/CTN	20pcs/CTN	12pcs/CTN

防爆电机 Explosion Proof Motor

WDMAL /WDMSB防爆电机适用于填充燃气的场所, 适用于汽油机、柴油机、防爆风机、防爆泵等动力系统。

WDMAL /WDMSB Explosion Proof Motor with steel plate housing,with Aluminum Hosing Suitable for the place where filled with burning gas and air, apply to the power system of petrol machine, diesel, explosion-proof fan and explosion-proof pump.



WDMAL



WDMSB



WDMAL-1

主要技术参数 Technical Specification							
型号 Model	功率 Power		电压 Voltage (V)	电流 Current (A)	转速 Speed (r/min)	频率 Frequency (Hz)	额定转矩 Rated Torque
	HP	KW					
WDMAL01	1	0.75	380	1.8	1400-1700	50/60	10.5
WDMAL02	1.5	1.1		2.5			10.5
WDMAL03	3/4	0.55		1.6			20.0
WDMSB01	3/4	0.55	220	4.0	1425-1725	50/60	1.8
WDMSB02	1	0.75		5.1			1.8
WDMSB03	1.5	1.1		6.5			1.7

止回阀 WDACV Angle Check Valve

用于汽油、柴油、煤油 Used for gasoline, kerosene, diesel oil, etc.

主要技术参数 Technical Specification	
型号 Model	WDACV角度止回阀
直径 Diameter	1.5" & 2"
螺纹 Thread	NPT/BSP/BSPF
包装 Package	20pcs/CTN



WDACV

油管接头 WD Hose Swivel

WD-1 系列不可旋转油管接头, 用于连接油管。

WD-2 系列可旋转油管接头, 用于连接油管, 可360°旋转, 方便加油。

WD-1 Unrotary swivels used for connecting the nozzle and the hose.

WD-2 Rotary swivels, used for connecting the nozzle and the hose, 360° swivel action.



WD-1



WD-1-1



WD-1-1A



WD-2



WD-2-1



WD-2-1A

主要技术参数 Technical Specification						
型号 Model	WD-1呆接头	WD-1-1新型呆接头	WD-1-1A变径呆接头	WD-2活接头	WD-2-1新型活接头	WD-2-1A变径活接头
直径 Diameter	3/4"-2"	3/4"-2"	3/4"&1"	3/4"-2"	3/4"-2"	3/4"-1"
螺纹 Thread	NPT/BSP/BSPF					
包装 Package	50pcs/CTN&100pcs/CTN					

WD-3 系列油枪后接头, 用于油枪
WD-3 Swivels used for Nozzle

WD-3-4 系列胶管接头, 用于油枪后接头
WD-3-4 Swivels used for WD-3 Swivels



WD-3



WD-3-1



WD-3-2



WD-3-3



WD-3-4



WD-3-5

主要技术参数 Technical Specification						
型号 Model	WD-3 WDZA后接头	WD-3-1半铜半铝	WD-3-2两个O形圈	WD-3-3三个O形圈	WD-3-4变径后接头	WD-3-5全铝
直径 Diameter	3/4"&1"	3/4"&1"&5"	3/4"&1"	3/4"&1"	3/4"&1"&1.5"	3/4"&1"&1.5"
螺纹 Thread	NPT/BSP/BSPF					
包装 Package	50pcs/CTN&100pcs/CTN					

万向接头 WDSW Swivel

WDSW1/3系列万向接头,用于用于连接油管和油枪,可180°旋转,方便加油。

WDSW1/3 Swivels used for connecting the nozzle and the hose,180°swivel action.

WDSW2/4系列万向接头,用于用于连接油管和油枪,可360°旋转,方便加油。

WDSW2/4 Swivels used for connecting the nozzle and the hose,360°swivel action.



WDSW1



WDSW3



WDSW4



WDSW2

视油镜 WDSYQ Series Oil Indicator



WDSYQ-1



WDSYQ-2



WDSYQ-4



WDSYQ-5

主要技术参数 Technical Specification				
型号 Model	WDSYQ-1	WDSYQ-2	WDSYQ-4	WDSYQ-5
材料 Material	铸铁 cast iron	铸铁 cast iron	铝合金AL-Alloy	铝合金AL-Alloy
进出口螺纹 Inlet&Outlet	进口Inlet: M33×1.5 出口Outlet: BSPF/NPT3/4"	BSPF/NPT 1"	BSPF/NPT 3/4"	进口Inlet: M33×1.5 出口Outlet: BSPF/NPT3/4"
包装尺寸 Dimension	42×35×35cm	50×29×36cm	50×29×32cm	50×29×36cm
净重 Net weight	20kg	27kg	24kg	19.5kg
毛重 Gross weight	21kg	27kg	26kg	20.5kg
包装 Package	20pc/CTN	200pc/CTN	200pc/CTN	50pc/CTN

铜底阀 WDFV Foot Valve

用于汽油、柴油、煤油 Used for gasoline,kerosene,diesel oil,etc.

其他尺寸需特别定制 Other size need special produce



主要技术参数 Technical Specification	
型号 Model	铜底阀WDFV Foot Valve
脱离速度 Valve closing speed	0.5s
工作温度 Working temperature	-30~55℃
螺纹 Thread	BSPF/NPT 1.5"/2"
包装尺寸 Dimension	37×31×18cm
净重 Net weight	21kg
毛重 Gross weight	22kg
包装 Package	20pcs/CTN
材料 Material	铜 Brass

波纹管 Flexible Pipe



WDFP-A



WDFP-T



WDFP-F



WDFP-SS

主要技术参数 Technical Specification

型号 Model	铜底阀WDFV Foot Valve
材料 Material	不锈钢 Stainless Steel
尺寸 Size	1", 1.5", 2", 3" 其他尺寸需特别定制 Other size need special produce
长度 Length	按需定制 As required

防爆盒 Junction Box WDJB



3 防爆盒 3-Port



5 防爆盒 5-Port



6 防爆盒 6-Port



8通防爆盒8-Port



加油机配件 Fuel Dispenser Parts

Welldone 汇洋能源

止回阀(波纹管与三角法兰之间)

Check valve (between bellows and triangular flange)



三角法兰1.5"

Triangular flange 1.5"



拉绳器 WDHR Hose reel

尺寸Size: +3/4", 1", 1.5"



不锈钢卷盘
Stainless steel reel



1.5"~2" 卷盘
1.5"~2" reel



1/2"~1" 卷盘
1/2"~1" reel



3/4~5" 电动卷盘
3/4~5" electric reel

测量桶 WDBJL Measuring Can



1L, 2L, 5L, 10L, 20L, 50L, 100L, 200L

WITH HAND HOLDER 手提式

材料Material: 不锈钢Stainless steel 304、碳钢cast steel



WITH BOTTOM VALVE 带底阀式



WITH BOTTOM VALVE 带底阀式



永嘉县威顿机械有限公司
YONGJIA WELLDONE MACHINE CO.,LTD.

地址：浙江省温州龙湾纬一东支路5号
Tel:+86-577-21828499
Email:sales@welldonemachine.com
Facebook:Huiyang Energy
YouTube:Welldone Machine
Twitter:@WelldoneMachine
Website:www.hydispenser.com

温州汇洋能源科技有限公司
WENZHOU HUIYANG ENERGY TECHNOLOGY CO.,LTD

Add:No.5 Weiyi East Road,Longwan,Wenzhou,Zhejiang,China
Fax:+86-577-21828482
WhatsApp:+86-15825667273
Facebook:WelldoneMachine
Instagram:WelldoneMachine
Skype:cute-room
Website:www.wdmachine.com

Scan the QR code to follow for more information

扫码二维码获取更多信息



Alibaba online shop



3D show



Made in China online shop



视频号



抖音号



微信公众号