


泵系列

PUMP SERIES

CE APPROVAL

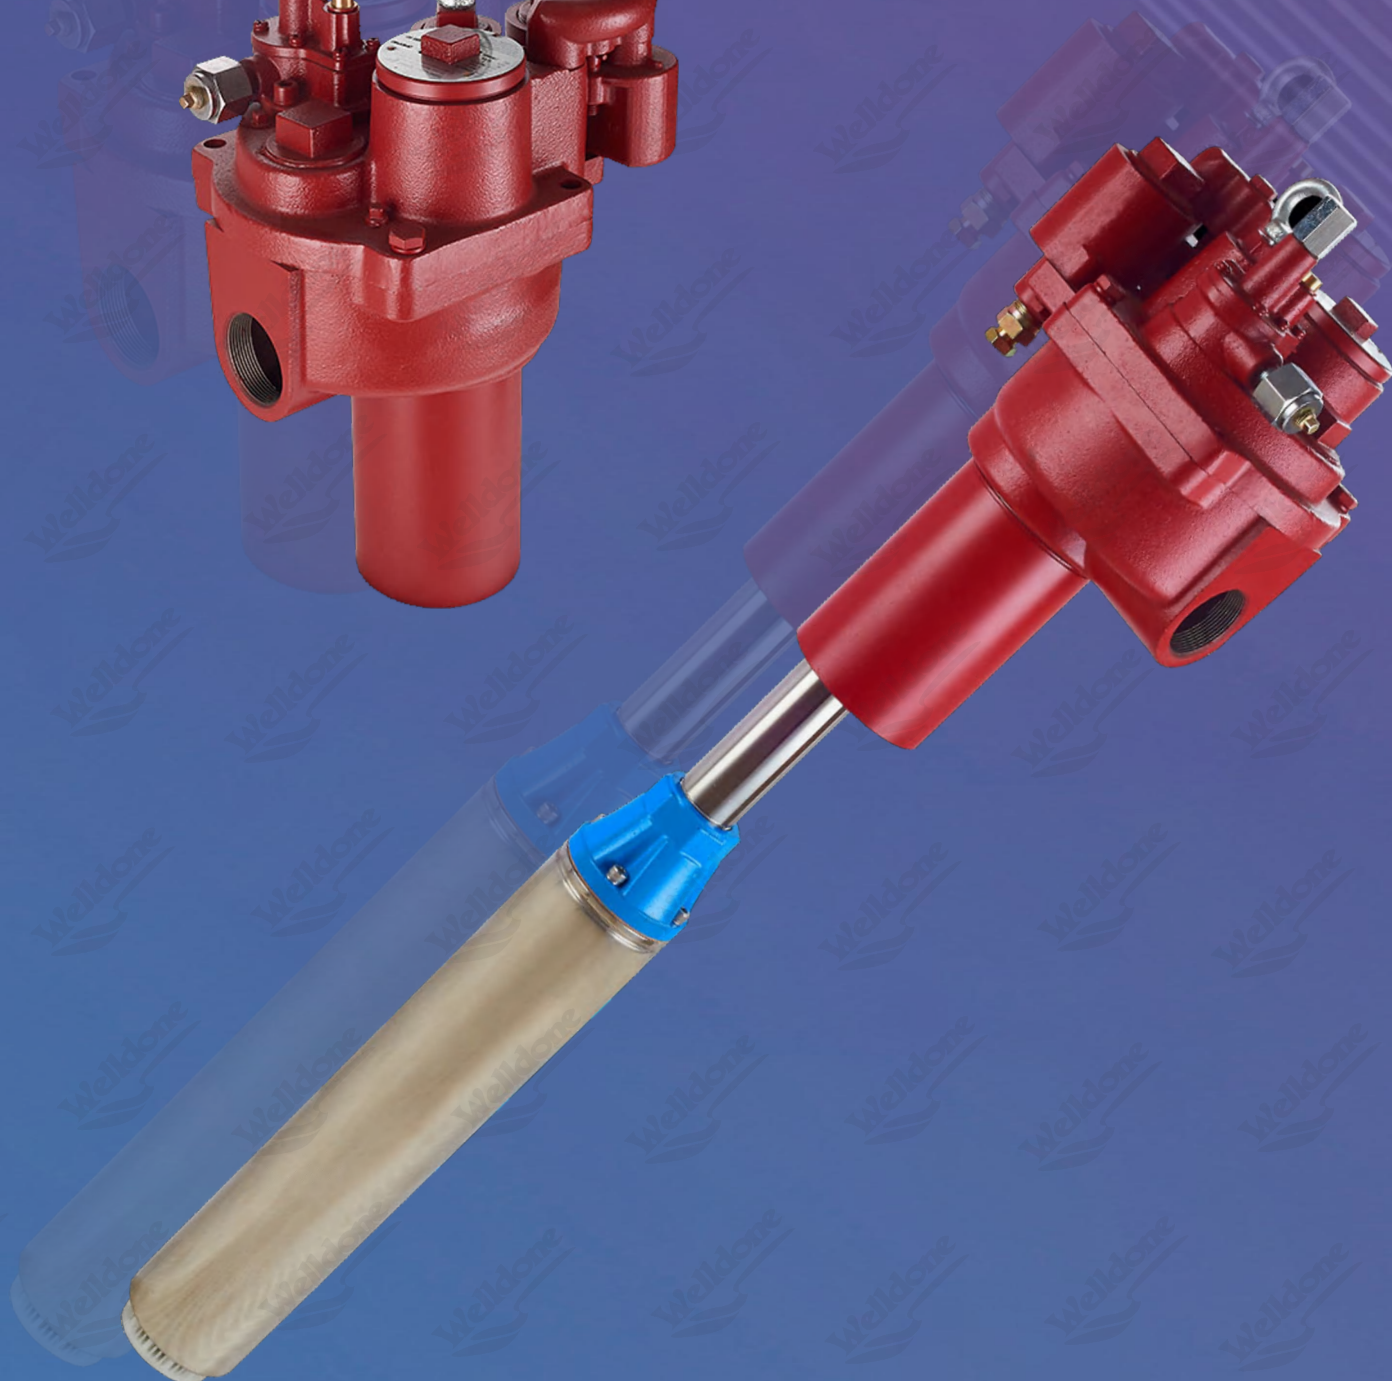

潜油泵 WDSP Submersible Pump ATEX Approval

结构紧凑、安装维修方便、噪音低、运行平衡、故障率低、使用寿命长；
内置止回阀、开关阀、安全阀（溢流阀）、真空阀，可带多支加油枪同时加油；
用于汽油、煤油、柴油等；
可防止油气化抽不上油的现象；油品输送距离大于自吸式油泵。

Compact structure,easy installation and maintenance,low noise,smooth operation,long service life.

Built-in check valve,switching valve,safety valve(relief valve) and vacuum valve.The submersible pump can take several nozzles to work at the same time.It is applicable to gasoline,kerosene,diesel,etc.


The submersible pump can avoid oil pumping problem caused by oil gasification.The distance of oil delivery is farther than self sucking pumps.




主要技术参数 Technical Specification

型号 Model	电源	额定功率HP	额定电流A	理论最高扬程m	理论最大流量L/min	出口压力MPa	电容器
WDSP33	208/230V,60 Hz单相	0.33	3.1	19	150	0.19	15
WDSP75	208/230V,60 Hz单相	0.75	6.1	20	200	0.2	25
WDSP150	208/230V,60 Hz单相	1.5	10.5	22	250	0.22	25
WDSPH150	208/230V,60 Hz单相	1.5	10.5	30	250	0.3	225
WDSP200	208/230V,60 Hz单相	2	11.4	25	380	0.25	40
WDSPH200	208/230V,60 Hz单相	2	11.4	32	380	0.32	40
WDSP75B	200/250V,50 Hz单相	0.75	6	25	200	0.25	25
WDSP150B	200/250V,50 Hz单相	1.5	9.5	27	250	0.27	25
WDSPH150B	200/250V,50 Hz单相	1.5	9.5	33	250	0.33	25
WDSP200B	200/250V,50 Hz单相	2	10.9	26	30	0.26	40
WDSPH200B	200/250V,50 Hz单相	2	10.9	30	380	0.30	40
WDSP75C	380/415V,50 Hz单相	0.75	2.1	25	200	0.25	/
WDSP150C	380/415V,50 Hz单相	1.5	3.5	27	250	0.27	/
WDSPH150C	380/415V,50 Hz单相	1.5	3.5	33	250	0.33	/
WDSP200C	380/415V,50 Hz单相	2	4.1	26	380	0.26	/
WDSPH200C	380/415V,50 Hz单相	2	4.1	30	380	0.30	/
WDSP3C	380/415V,50 Hz单相	3	5.4	25	600	0.25	/
WDSP5C	380/415V,50 Hz单相	5	8.7	30	1000	0.3	/
WDSPMVS2 变频电机	190/70V,三相	2	6.7	17~30	150~380	0.17~0.3	/

WDYB泵WDYB Series Rotary Vane Pump (ATEX Approval)

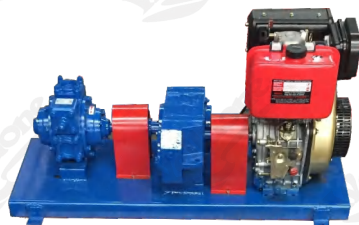

带联轴器连接 with coupling connect

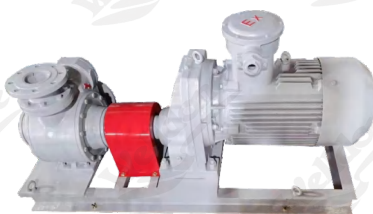

带皮带轮连接 with belt pulley



结构 Construction



优点 Advantage

快速、低噪音的长期使用
可调的安全阀防止泵压力过大。
叶片式结构性能稳定、无故障，可靠性高

Durable pumps for fast and quiet operation.
Adjustable relief valve protects pump from excessive pressure.
Sliding vane design provides sustained performance and trouble free operation,high reliability.

适用范围 Application

油罐车
船舶加油
润滑油
航空燃油
石油化工、汽油哦、柴油、生物燃油、溶剂等传输

Oil tank truck
Fleet refueling
Lube oil
Aviation refuelers
Transport of petro chemicals,gasoline,biofuels, solvents and many more.

主要技术参数 Technical Specification

型号 Model	WDYB-50		WDYB-65		WDYB-80		WDYB-100	
	不带电机 Without motor	带连轴器连接 带皮带轮连接 with coupling connect with belt pulley	不带电机 Without motor	带连轴器连接 带皮带轮连接 with coupling connect with belt pulley	不带电机 Without motor	带连轴器连接 带皮带轮连接 with coupling connect with belt pulley	不带电机 Without motor	带连轴器连接 带皮带轮连接 with coupling connect with belt pulley
口径 Size	50mm/2"		65mm/2.5"		80mm/3"		100mm/4"	
泵转速 Pump speed	400-640RPM		400-640RPM		400-640RPM		500RPM	
最大流量 Max Flow rate	150-300L/min		300-500L/min		600-1000L/min		1500-1900L/min	
真空度 Vacuum	0.5Bar							
工作压力 Working pressure	5Bar							
电机功率 Motor power	2.2KW		4KW		7.5KW		18.5KW	
包装尺寸(cm) Dimension	44 × 35 × 35	76 × 51 × 55	46 × 34 × 37	76 × 54 × 56	49 × 42 × 42	125 × 46 × 79	58 × 55 × 61	123 x 91 x 86
净重 Net weight	31KG	86KG	40KG	126KG	68KG	238KG	160KG	550KG
毛重 Gross weight	34KG	118KG	47KG	146KG	74KG	266KG	178KG	580KG
包装 Package	1台木箱 1pc/wooden case							



WDLD



优点 Advantage

适用于汽油、煤油、柴油;

当管线出现大于或等于11.4L/min的泄漏量,侧漏器将及时控制出油量;

当泄漏量低于11.4L/min,侧漏器将延迟2-3s打开;

For Gasoline,Kerosene,Diesel,etc.

The leak detector will control the output of oil in time, when the oil leakage in the pipeline is no less than 11.4L/min;

The leak detector will delay to open in 2-3 seconds,when the oil leakage is less than 11.4L/min;

WDLD2 mechanical leak detector can keep maximum flow rate while several nozzles are working at the same time.

WDLD2机械测漏器可在多把加油枪同时打开时保持最大流量工作状态。

随着人类环保意识的不断增强,世界各地陆续制定了相关环保法规,为了遵守当地的环保法规,防止油品泄露带来的污染,侧漏器这一技术产品被开发并广泛应用。

WDLD机械式测漏器是一种膜片式,对输送压力在1.4-3.5KPa之间的油品管线的泄漏进行监测的潜油泵可选装置。

能够自动对流速大于11.4L/min或压力小于0.6KPa的管线泄漏进行监测,如泄漏存在,将通过关闭内部活塞阀门,使管线流速限制为11.4L/min,让加油站用户知道输油管线存在泄漏。

With the growing consciousness of human environmental protection, relevant environmental protection rules and regulations are made one by one around the world. In order to observe the local environmental protection rules and regulations, and to avoid pollution from oil leakage, the leak detector is developed and put into use widely. Under the transmission pressure at 1.4-3.5KPa, diaphragm type of WDLD mechanical leak detector is a selectable device for submersible pump to monitor the oil leakage in the pipeline. The leak detector can automatically carry out the supervision to the flow rate over 11.4L/min or pressure less than 0.6KPa of the pipeline. If leakage existing, it will limit the flow rate at 11.4L/min through closing the inner piston valve, which will let the users know that there is oil leakage in the pipeline.

叶片泵 WD-SUB Series Rotary Vane Pump (CE Approval)

概论 Overviews

WD-SUB系列容积式叶片泵，用于输送汽油、煤油、柴油等轻质油品。该泵不仅可用于油库中卸油、抽底油、扫仓、加油，还可以用于机动加油车、油罐车

WD-SUB Series Vane Pump is positive displacement vane pump, applied to transfer gasoline, kerosene, diesel and other light oil, used to load & unload in stock terminal, also on oil tank trucks and mobile fuel unit.

优点 Advantage

极佳的真空度，高达0.06MPa，可替代真空系统抽卸槽车底油，油船扫仓等液、气两相输送，气液混输比可达50%，彻底解决气阻、气蚀现象
叶片式结构性能稳定、无故障，可靠性高可调法人溢流阀防止泵压力过大

Vacuum up to 0.06MPa, instead of vacuum pump to clean the tank in vessel, truck, etc. To transport gas-liquid two-phase, up to 50%, completely solve air lock, cavitation. Sliding vane design provides sustained performance and trouble free operation, high reliability Adjustable relief valve protects pump from excessive pressure.



WDSUB-40



WDSUB-50



WDSUB-80

主要技术参数 Technical Specification

型号 Model	WDSUB-40	WDSUB-50	WDSUB-80
口径 Size	40mm/1.5"	50mm/2"	80mm/3"
泵转速 Pump speed	1400RPM	1400RPM	960RPM
最大流量 Max Flow rate	180L/min	250L/min	500L/min
真空度 Vacuum	0.06MPa	0.06MPa	0.06MPa
工作压力 Working pressure	6Bar		
电机功率 Motor power	2.2KW	2.2KW	7.5KW
包装尺寸 Dimension	40 × 33 × 33cm	32 × 32 × 36cm	49 × 42 × 42cm
净重 Net weight	20KG	20KG	40KG
毛重 Gross weight	25KG	25KG	49KG
包装 Package	1台木箱 1pc/wooden case		

不锈钢泵头 KCB Stainless steel pump head

KCB型齿轮油泵适用于输送各种不含固体颗粒，粘度为5-1500C.s.t，温度在200℃以下的各种油类，如原油，柴油，煤油，润滑油，动植物油等。配有铜齿轮可输送低闪点液体，如汽油，苯等。

KCB type gear pump is applicable to transport all kinds of solid particles, viscosity of 5-1500C.s.t and temperature in below 200 DEG C of all kinds of oils, such as crude oil, diesel, kerosene, lubricants, and dynamic plant oil etc.. Equipped with copper gear can transport low flash point liquid, such as gasoline, benzene etc..

结构紧凑，使用保养方便

由齿轮，轴，泵体，安全阀，轴端密封组成

输送高粘度液体，低压力，大流量

具有良好的自吸性能，故泵工作前不需灌入液体

动力驱动可选电机或者柴油机

内置安全阀，超载时起安全保护作用

在一切工业领域中，均可做润滑油泵用。

广泛应用于石油，化工，管道输油，船舶，矿山，冶金，电站等行业。

在输油系统中可用做传输，增压泵，在燃油系统中可用作输送，加压，喷射的燃油泵。

Compact structure, easy to use and maintenance

By gear, shaft, pump body, safety valve, shaft end seal

Transporting high viscosity liquid, low pressure, large flow rate Built in safety valve, overload safety protection


Power supply optional motor or diesel engine

Widely used in petroleum, chemical industry, pipeline transportation, ships, mines, metallurgy, power plants and other industries.

In the oil system can be used to transfer, booster pump, in the fuel system can be used for transport, compression, injection of the fuel pump.

In all industrial areas, can be used as lubricating oil pump.

Has a good self absorption performance, it is not required before the pump to fill the liquid

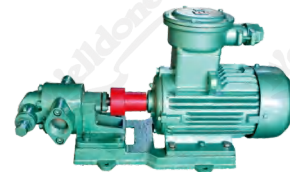


主要技术参数 Technical Specification

型号 Model	口径 Caliber (mm)	流量 Flow (m³/h)	压力 pressure (MPa)	吸程 absorption process (m)	功率 Power (kW)	转速 Speed (rpm)
KCB18.3	3/4"	18.3	1.45	5	1.5	1400
KCB33.3	3/4"	33.3	1.45	5	2.2	1420
KCB55	1"	55	0.33	5	1.5	1400
KCB83.3	1 1/2"	83.3	0.33	5	2.2	1420
KCB133.3	2"	133.3	0.33	5	3	1450
KCB200	2"	200	0.33	5	4	1450
KCB200	2"	200	0.6	5	5.5	1450
KCB200	2"	200	1.0	5	7.5	1450
KCB350	2"	350	0.6	5	7.5	1450
KCB300	3"	300	0.36	5	5.5	1450
KCB300	3"	300	0.6	5	7.5	1450
KCB483.3	3"	483.3	0.36	5	7.5	1450
KCB483.3	3"	483.3	1.0	5	11	1450
KCB650	3"	650	0.6	5	11	1450
KCB633	4"	633	0.25	5	11	1450
KCB960	4"	960	0.3	5	18.5	1450
KCB1200	4"	1200	0.3	5	22	1450

WDTPE泵 WDTPE Series Rotary Vane Pump

Welldone 汇洋能源

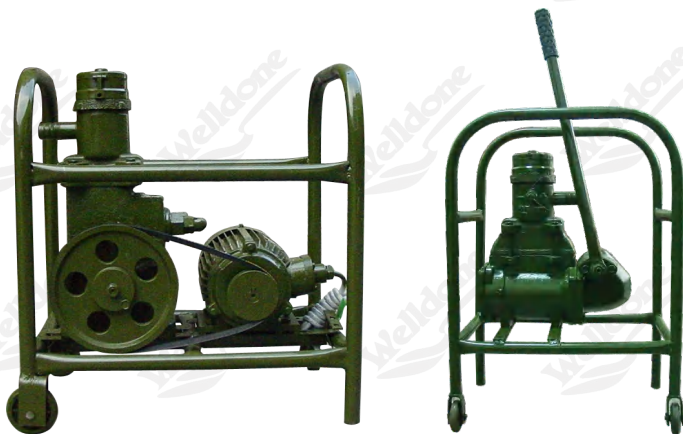

WDTPE

WDTPH



电动泵 Electric pump

主要技术参数 Technical Specification

型号 Model	WDTPE
进出口口径 Import and export caliber	25mm
起动注油 Allowed Priming	5M
准确度 Accuracy	± 1%
电压 Voltage	380v
累计计数范围 Accumulated counting range	999L
流量 Flow	55-65l/min
可升举高度 Allowed Lift	25M
电机功率 Motor power	0.8KW
重量 Weight	75KG

手动泵 Handshake Pump

主要技术参数 Technical Specification

型号 Model	WDTPH
进出口口径 Import and export caliber	25mm
准确度 Accuracy	± 1%
活塞直径 Piston diameter	90mm
重复次数 Repeated times	35-45times/min
可升举高度 Allowed Lift	20m
重量 Weight	27kg
最大压力 Max.pressure	0.2Mpa
起动注油 Allowed Priming	4-5m
流量 Flow	35-55L/min

隔膜泵 WDQBY Diaphragm Pump

WDQBY隔膜泵根据介质的不同可以选择不同的泵体材质（铸铁，铝合金，不锈钢，工程塑料，卫生食品级等）根据流体介质的不同，可选择隔膜片，球和球座的材质（丁晴橡胶，氯丁橡胶，氟橡胶，聚四氟乙烯，特氟龙等）。有不同规格的口径(10mm,15mm,25mm,40mm,50mm,65mm,80mm,100mm)。

WDQBY Diaphragm pump have different material of pump body to choose according to different medium,like cast iron,aluminum alloy,stainless steel,PP,Food grade and so on;for the diaphragm,ball and ball seat also have different material for choose like Buna-N rubber,neoprene,fluororubber,PTFE,Teflon and so on.

We have different caliber 10mm,15mm,25mm,40mm,50mm,65mm,80mm,100mm.

用途 Application

- 1.气动隔膜泵吸花生酱、泡菜、土豆泥、小红肠、果酱、巧克力等。
- 2.气动油漆泵吸油漆、树脂、颜料。
- 3.泵吸粘合剂和胶水、全部种类可用泵吸取。
- 4.各种瓦、瓷、砖器及陶器釉浆。
- 5.气动浓浆泵吸油井钻好后，用泵吸沉积物及灌浆。
- 6.气动涂料泵吸各种乳剂和填料。
- 7.泵吸各种污水。
- 8.用泵为油轮，驳船清仓吸取仓内污水。
- 9.啤酒花和酵母浆、糖浆、糖。
- 10.泵吸矿井、坑道、隧道、选矿、矿渣中的积水。泵吸水泥灌浆及灰浆。
- 11.各种磨料、腐蚀剂、石油及泥浆、清洗油垢及一般容器。
- 12.各种剧毒、易燃、易挥发液体。
- 13.耐腐蚀气动隔膜泵吸各种强酸、强碱、强腐蚀性液体。
- 14.各种高温液体最高可耐150℃。
- 15.作为各种固液体分离设备的前级送压装置。

1. Pump peanut butter, pickles, mashed potatoes, small sausage, fruit jam, chocolate, etc.
2. Pump paints, rubber, paint.
3. Glue and all kinds of available drain pump.
4. All kinds of tiles, porcelain, tiles, and pottery glaze slurry.
5. Oil drilling, pump suction sediments and grouting.
6. Various emulsion pump suction and packing.
7. Pump all kinds of waste water.
8. Pump for oil tankers, barges clearance drain sewage in warehouse.
9. Hops and yeast slurry, syrup, sugar.
10. Pump mine, tunnel, tunnel, ore dressing, slag in water. Pumped cement grout and mortar.
11. All kinds of abrasive, corrosion inhibitor, oil and mud, cleaning oil dirties and general container.
12. All kinds of highly toxic, flammable, volatile liquid.
13. All kinds of strong acid, strong alkali, strong corrosive liquid.
14. All kinds of high temperature liquid up to 150 °C.
15. For all kinds of solid liquid separation equipment level before sending pressure device


主要技术参数 Technical Specification

型号 Model	WDQBY-C	WDQBY-A	WDQBY-SS	WDQBY-PP	WDQBY-F
泵体材质 Material of pump body	铸铁 Material of pump body	铝合金 Aluminum alloy	不锈钢 Stainless steel	塑料 PP	食品级不锈钢 Food grade Stainless steel
出口压力 Outlet pressure	=7bar				
口径 Caliber	10~100mm				

隔膜泵 WDQBY Diaphragm Pump



WDQBY-SSD

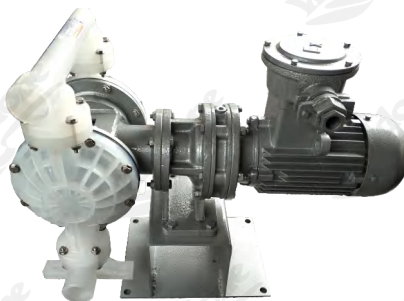

WDQBY-PPD



WDQBY-SS



WDQBY-25



WDQBY-25



WDQBY-PP-50



WDQBY-50



WDQBY-50



WDQBY-80



WDQBY-80



WDQBY-PP-100



WDQBY-100

柱塞泵 WD triplex plunger pump



材质:SS316I /黄铜
Bolt:ss316I/brass .

泵头: 高强度ss316I /黄铜, 使用寿命长
The pump head: high strength ss316I/brass with long service life.

柱塞: 精密加工超厚陶瓷柱塞, 使用寿命更长, 耐用性更好
Plunger: precision machining super thick ceramic plunger, longer service life, better durability.

曲轴箱: 精密铸铝制造, 大型散热片, 防腐蚀特殊工艺, 双面和后盖的视觉视窗油窗
Crankcase: precision cast aluminum manufacturing, large heat sink, anti-corrosive special process, visual view oil window at double sides and rear cover.

曲柄: 精密锻造工艺和热处理确保曲轴强度, 保证即使用寿命和耐久性
Crank: precision forging process and heat treatment to ensure that the crank shaft strength, to ensure that the service life and durability.

轴承: 锥形滚珠轴承可以提供更多的载荷支撑, 平稳且降低曲轴箱温度, 确保泵运行寿命长。
Bearing: conical ball bearing can provide more load support, smooth and lower crankcase temperature to ensure the pump running long service life.

单向阀, 阀座和弹簧: 强力阀笼, 特殊结构设计, 结实耐用, ss316I/黄铜材质的阀座和阀杆, 延长单向阀的使用寿命水封和密封。
One-way valve, the seat and spring: the strong valve cage, special structural design, strong and durable, ss316I /brass material of valve seat and valve stem, extend the Service life of one-way valve the water seal and sealing

封套: 连续润滑密封, 使用寿命长; spl柱塞定位器
Sleeve: continuous lubrication sealing, long service life ,spl plunger retainer.

油封: 三个油封和弹簧负载可以很好地保证耐用性并延长使用寿命
Oil seal: three oil seal and spring load can well ensure durability and prolong service life.

柱塞连杆: 超级不锈钢材质, 使用寿命长, 确保安全稳定
Plunger connecting rod: super stainless steel material, long service life, ensure the safe and stable.

连杆: 整体特制超青铜合金材质, 高压, 负载强度较高, 更长的使用寿命
Connecting rod: overall special super bronze alloy material, high pressure, load intensity is higher, longer service life.



WDLB



WDLT



WDBM



WDDS



WDTK

柱塞泵 WD Triplex Plunger Pump



主要技术参数 Technical Specification

型号 Model	Flow		Pressure		Power		Speed	Plunger Dia	Piston stroke
	L/min	gpm	bar	psi	hp	kw	rpm	mm	mm
WDLT									
WDLT12.07N	11.58	3.06	70	1015	3	2.2	1450	22	7
WDLT14.07N	14.06	3.71	70	1015	3	2.2	1450	22	8.5
WDLT16.07N	16.54	4.37	70	1015	4	3	1450	22	10
WDLT23.07N	23.15	6.12	70	1015	5.5	4	1450	22	14
WDLT26.07N	26.46	6.99	70	1015	5.5	4	1450	22	16
WDLT30.07N	29.86	7.9	70	1015	7.5	5.5	1450	25	14
WDLB									
WDLB6.10	5.38	1.42	100	1450	1.5	1.1	1450	15	7
WDLB12.10N	11.07	2.92	100	1450	3	2.2	1450	18	10
WDLB15.07N	15.5	4.09	70	1015	3	2.2	1450	18	14
WDLB15.10N	15.5	4.09	100	1450	4	3	1450	18	14
WDBM									
WDBM0210	2	0.53	100	1450	0.75	0.55	1450	15	3
WDBM0410	4	1.06	100	1450	1.0	0.75	1450	15	5
WDBM0610	6	1.59	100	1450	1.5	1.1	1450	15	7
WDBM0810	8	2.11	100	1450	2.0	1.5	1450	15	10
WDBM1218	12	3.17	180	2610	5.5	4.0	1450	18	10
WDBM1510	15	3.96	100	1450	4.0	3.0	1450	18	14
WDBM1518	15	3.96	180	2160	7.5	5.5	1450	18	14
WDBM1525	15	3.96	250	3625	13	7.5	1450	18	14
WDBM1910	19	5.02	100	1450	5.5	4.4	1450	20	14
WDTK									
WDTK1410	14	3.70	100	1450	4	4	1450	22	8.5
WDTK1610	16	4.23	100	1450	4	4	1450	22	10
WDTK1640	16	4.23	400	5800	20	20	1450	22	10
WDTK2310	23	6.08	100	1450	5.5	5.5	1450	22	14
WDTK2335	23	6.08	350	5075	20	20	1450	22	14
WDTK3010	30	7.93	100	1450	7.5	7.5	1450	25	14
WDDS									
WDDS2135	21	5.55	350	5075	20	15	1450	18	20
WDDS2150	21	5.55	500	7250	30	22	1450	18	20
WDDS5015	50	13.21	150	2175	20	15	1450	28	20
WDDS7010	70	18.49	100	1450	20	15	1450	32	20

自吸滑板泵 KYB Self-Priming Vane Pump

用于柴油、煤油、汽油、苯等干净、轻质油品

铸铁泵体，全铜滑片，动力可选配防爆电机或柴油机

进出口用快速接头连接

可长时间连续工作

滑轮拖车设计，使用方便，易操作，易维护

For diesel oil, Kerosene, gasoline, benzene and other clean, light oily liquid

Continuous working

Quick coupling connection on inlet/outlet side

Cast iron pump casing, completely bronze Vanes, electric motor or diesel engine driven for option

Strong self-priming. It is not necessary to pour oil before pump working Trailer type design, moveable easy to use and maintenance

滑片泵，输入功率小，大流量

内置溢流阀、过滤网

最高传输液体温度可达150℃

超强自吸能力，工作前不必向泵内灌入油液


Vane pump, large output with small power input

Bypass valve built in, with inner filter

Max liquid temperature up to 150℃



KYB-2

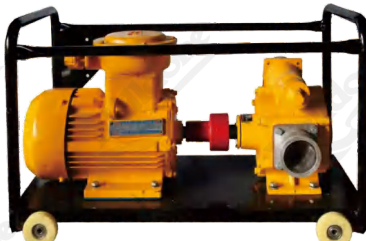

KYB-3



KYB-1

防爆油泵 WCB Explosion proof oil pump

用于汽油，甲醇，酒精，食用油，植物油，化学溶液，热油

220V 380V防爆电机

氟橡胶油封/高硬度齿轮/耐腐蚀泵体/耐高温

For gasoline, methanol, alcohol, For edible oil, vegetable oil, chemical

solution, hot oil

220V 380V explosion proof motor

Fluorine rubber oil seal/High hardness gear/Corrosion proof pump body/high temperature resistance



WCB-50S



WCB-75S

主要技术参数 Technical Specification

型号 Model	WCB-50S	WCB-75S
进口 Imported	3/4"	1"
出口 Outlet	3/4"	1"
最大流量 Maximun flow	50L/min	75L/min
电机 Electric machinery	550W	750W
接口 Interface	NPT/BSPE thread	
电压 Voltage	AC220V/380V 50 Hz	
转速 Speed	2800/1450rpm	
泵体材料 Pump body material	SS304	
净重 Netweight	14kg/pc	15kg/pc
包装尺寸 Packaging size	41 × 20.5 × 23cm 1pc/carton	46.5 × 21 × 24cm 1pc/carton

电动油泵总成 Electric Transfer Pump Unit

Welldone 汇洋能源



WDETP-60B-1



WDETP-60B



WDETP-60A



WDETP-80A

WDETP-A

WDETP-A系列电动油泵总成，根据客户的要求，具有多种灵活的组合方式。装配1"的快速接头后，可以快速方便地安装到小型油罐上。It is easy to connect to 1" quick coupling of the drum or tank, with or without flow meter.

主要技术参数 Technical Specification

型号 Model		WDETP-60A	WDETP-80A	WDETP-40A
标准配置 Standard	泵 Pump	DYB60-AC220	DYB80-A220	DYB40-DC12
	流量表 Flow meter	FM-120L in Liter	FM-120L in Liter	FM-120L in Liter
	油管 Hose	4m	4m	4m
	手动油枪 Manual nozzle	J40-A	J40-A	J40-A
	支架 Bracket	Yes	Yes	Yes
可选配置 Option	泵 Pump	DYB60-AC220V	DYB80-AC220V	DYB40-DC24V/DC12V
	流量表 Flow meter	FM-40G in Gallon	FM-40G in Gallon	FM-40G in Gallon
	自封油枪 Automatic nozzle	Yes	Yes	Yes
	支架 Bracket	No	No	No
	2M进油管 2M Inlet hose	Yes	Yes	Yes
	过滤止回阀 Filter check valve	Yes	Yes	Yes
包装尺寸 Dimension		42 × 35 × 34cm	42 × 35 × 34cm	42 × 35 × 34cm
净重 Net weight		16kg	23kg	12kg
毛重 Gross weight		17kg	24kg	13kg
包装 Package		1pc/ctn		

WDETP-B

WDETP-B 系列电动油泵总成是在WDETP-A 电动油泵基础上改进而成，采用了全封闭的箱体结构；增加了开关、枪架，标配自封油枪。WDETP-B Series Electric Transfer Pump Unit is improved from WDETP-A, with completely close metal case, and switch, nozzle holder, automatic nozzle, also manual nozzle, inlet hose for option.

主要技术参数 Technical Specification

型号 Model	WDETP-60B	WDETP-80B	WDETP-40B
包装尺寸 Dimension	45 × 42 × 31cm	45 × 42 × 40cm	45 × 42 × 31cm
净重 Net weight	20kg	25kg	16kg
毛重 Gross weight	21kg	27kg	17kg
包装 Package	1pc/ctn		

电动油泵 DYB Electric Transfer Pump

Welldone 汇洋能源

用途和特点 Use and characteristic

用于柴油、煤油
叶片泵，机械密封，安全可靠
铸铁泵体，抗腐蚀涂层
内置100micron过滤网，易于清洗
铸铝制电机，防护等级IP54
连续运转
内置溢流阀

For fueling diesel,kerosene,not for gasoline
Mechanical seal that guarantees constant reliability ,even in low temperatures.
Cast-iron pump casing,treated against corrosion and paint-finished.
Vane pump with steel rotor
Relief valve built in
In-built 100-micron filter,easily accessible for cleaning
Induction motor with aluminium casing
Grade of protection:IP54
Continuous running



DYB80-AC220/110



DYB60-DC12/24



DYB40-DC12/24

主要技术参数 Technical Specification

型号 Model	DYB60-AC220/110	DYB80-AC220/110	DYB40-DC12/DC24
流量 Flow rate	20-60 L/min	20-80 L/min	20-40 L/min
最大工作压力 Max.pressure	3bar	3bar	3bar
电源 Power	AC220V ± 10%50Hz AC110v ± 10%50Hz	AC220V ± 10%50Hz AC110v ± 10%50Hz	DC12/DC24
溢流阀 By pass valve	Yes	Yes	Yes
过滤网 Strainer	Yes	Yes	No
进出口 Inlet&outlet	1"	1"	$\frac{3}{4}$ "
功率 Power	375W	550W	120W
包装尺寸 Dimension	50 × 30 × 25cm	29 × 23 × 26cm	43 × 25 × 24cm
净重 Net weight	15kg	12kg	7kg
毛重 Gross weight	16kg	13kg	8kg
包装 Package		2pcs/carton	

电动油泵系列 Electric Oil Pump Series



技术参数 Technical Parameters

型号 Model : WDTP-60	流量 Flow : 60L/min
口径 Caliber : DN25	功率 Power : 500W
电压 Voltage : DC12V/24V	



技术参数 Technical Parameters

型号 Model : WDTD-60-EX	流量 Flow : 60L/min
口径 Caliber : DN25	功率 Power : 550W
电压 Voltage : 220V	



技术参数 Technical Parameters

型号 Model : WDTP-60A	流量 Flow : 60L/min
口径 Caliber : DN25	功率 Power : 500W
电压 Voltage : DC12V/24V	



技术参数 Technical Parameters

型号 Model : WDTP-60A-EX	流量 Flow : 60L/min
口径 Caliber : DN25	功率 Power : 550W
电压 Voltage : 220V	



技术参数 Technical Parameters

型号 Model : DYB-70	型号 Model : DYB-70
口径 Caliber : DN25	口径 Caliber : DN25
流量 Flow : 70L/min	流量 Flow : 70L/min
功率 Power : 550W	功率 Power : 550W
电压 Voltage : DC12V/24V	电压 Voltage : AC220V



技术参数 Technical Parameters

型号 Model : WDTP-80	流量 Flow : 60/80L/min
口径 Caliber : DN25	功率 Power : 600W
电压 Voltage : DC12V/24V	

电动油泵系列 Electric Oil Pump Series

Welldone 汇洋能源



技术参数 Technical Parameters

型号 Model: WDYB-300	流量 Flow: 300L/min
口径 Caliber: DN50	功率 Power: 1.5KW
电压 Voltage: DC12V/24V	



技术参数 Technical Parameters

型号 Model: WDYB-300	流量 Flow: 350L/min
口径 Caliber: DN50	功率 Power: 2.2KW
电压 Voltage: 220V	



技术参数 Technical Parameters

型号 Model: WDTP-1500	流量 Flow: 300L/min
口径 Caliber: DN50	功率 Power: 1.5KW
电压 Voltage: DC12V/24V	



技术参数 Technical Parameters

型号 Model: WDTP-1100	流量 Flow: 170L/min
口径 Caliber: DN40	功率 Power: 1.1KW
电压 Voltage: DC12V/24V	



技术参数 Technical Parameters

型号 Model: WDTP-1100	流量 Flow: 140L/min
口径 Caliber: DN40	功率 Power: 1.1KW
电压 Voltage: 220V	



技术参数 Technical Parameters

型号 Model: WDTP-80A	流量 Flow: 60/80L/min
口径 Caliber: DN25	功率 Power: 750W
电压 Voltage: 220V	

电动抽油泵系列 Electric oil pump series

Welldone 汇洋能源



技术参数 Technical Parameters

型号 Model : DYB-40	功率Power : 200W
口径 Caliber : DN20	电压 Voltage : AC220V
流量Flow : 40L/min	



技术参数 Technical Parameters

型号 Model : 40 Lithium pump	功率Power : 180W
口径 Caliber : 1/4"	电压 Voltage : 24V
流量Flow : 5-40L/min	最大工作压力 Max.Pressure:3Bar



技术参数 Technical Parameters

型号 Model : DYB-100	型号 Model : DYB-100
口径 Caliber : DN25	口径 Caliber : DN25
流量Flow : 100L/min	流量Flow : 100L/min
功率Power : 600W	功率Power : 600W
电压 Voltage : DC12V/24V	电压 Voltage : AC220V



技术参数 Technical Parameters

型号 Model : DYB-100	流量Flow : 100L/min
口径 Caliber : DN25	功率Power : 600W
电压 Voltage : 220V	



技术参数 Technical Parameters

型号 Model : 40 Self-priming pump	流量Flow : 5-40L/min
口径 Caliber : 3/4"	功率Power : 180W
电压 Voltage : 12V/24V/220V	



技术参数 Technical Parameters

型号 Model : DYB-40	流量Flow : 40L/min
口径 Caliber : DN20	功率Power : 200W
电压 Voltage : DC12V/24V	



技术参数 Technical Parameters

型号 Model : 60 Self-priming pump 流量 Flow : 20-60L/min

口径 Caliber : 1"

功率 Power : 550W

最大工作压力 Max. Pressure: 3Bar 电压 Voltage : 220V/110V



技术参数 Technical Parameters

型号 Model : DYB-150

流量 Flow : 150L/min

口径 Caliber : DN40

功率 Power : 1.1KW

电压 Voltage : DC12V/24V



技术参数 Technical Parameters

型号 Model : WDQZ-50/80

流量 Flow : 600/900L/min

口径 Caliber : DN50/80

功率 Power : 4KW/7.5KW

电压 Voltage : 380V

加油机一体化阻燃塑料加油罐

Integrated flame retardant plastic filling tank



全自动大流量加注机，油满自动关枪;柴油汽油通用，控油精准;多规格流量体积，可根据需求进行定制
Automatic large flow refueling machine, oil full automatic gun off.Diesel gasoline universal, accurate oil control.
Multi-specification flow volume, can be customized according to requirements

主要技术参数 Technical Specification

型号 Model	240L 塑箱加注设备 240L Plastic boxfilling equipment	270L 塑箱加注设备 270L Plastic boxfilling equipment	480L 塑箱加注设备 480L Plastic boxfilling equipment	600L 塑箱加注设备 600L Plastic boxfilling equipment
进出口径 Size	1"	1"	1"	1"
电压 Voltage	12/24/220V	12/24/220V	12/24/220V	12/24/220V
功率 Power	180W	180W	180W	180W
流量范围 Flow Range	10-60L/min	10-60L/min	10-60L/min	10-60L/min
最大工作压力 Max.Pressure	3Bar	3Bar	3Bar	3Bar
标准配置 Standard configuration	EXP-EQ 自吸油泵 EXP-EQ self-priming oil pump			
	4m 油管 4m oil pipe			
可选配 Optional	自封加油枪 Self-sealing refueling gun			
	涡轮表 Turbine meter			
	计量枪 Measuring gun			
	防爆泵 Explosion-proof pump			
	自动启停系统 Automatic start and stop system			
	EXP-EQ 计量表 EXP-EQ Measurement table			
		定量表 Scaler		定量表 Scaler
包装尺寸 Dimension	690*930*620mm	650*860*680mm	800*1200*800mm	900*1040*870mm
净重 Net Weight	42kg		60kg	
包装 Package	1台/纸箱 1PCS/CTN	1台/纸箱 1PCS/CTN	1台/纸箱 1PCS/CTN	1台/纸箱 1PCS/CTN

防爆电动油泵总成 Electric Transfer Pump,Explosion Proof

WDDYB50/75-DC12B



用于柴油、汽油、煤矿油、溶剂油和庚烷
防爆永磁电动机，带过热保护
内置过滤网、溢流阀
滚珠轴承结构，无需润滑
1" 4米油管，1" 手动油枪
防水，防雨
油枪架保护防尘防脏
油罐口2" 接口螺纹
抗腐蚀进油管
可以30分钟连续运转

For diesel, gasoline, kerosene, mineral spirits, solvent and heptantne
Explosion-proof permanent magnet motor with thermal overload protection
Built-in strainer, relief valve
Ball bearing construction, no lubrication required
1" 4 meter hose and 1" manual nozzle
Nozzle boot that protects against dirt and contamination
2" threaded base for tank openings
Corrosion-proof section pipe
Rain proof, water proof
30-minute run continuously

可选配件 Option

自封油枪 Automatic nozzle WDLLJ-120L/G 流量计 WDLLJ-120L/G meter in gallons or liters

主要技术参数 Technical Specification

型号 Model	WDDYB50-DC12B/24B	WDDYB75-DC12B
泵体 Body material	Cast iron	Cast iron
最大流量 Max. flow rate	15GPM(57LPM)	20GPM(76LPM)
防爆电机 Explosion-proof motor	1/4" HP	1/4" HP
电压 Voltage	DC12 OR DC24	DC12
进口 Inlet	1" NPT	1" NPT
出口 outlet	3/4" NPT	1" NPT
油罐适配器 Threaded tank adapter	2" NPT	2" NPT
带油枪挂钩 Nozzle hanger	Yes	Yes

电动油桶泵 Electric transfer pump



电动油桶泵 Electric transfer pump

电动油桶泵适用于从油桶或类似容器里抽吸各种腐蚀性，无杂质，低粘度液体。配用不同材质和电机，可输送柴油，煤油，机油，汽油，液压油，动植物油，牛奶，饮料以及化工液体介质。

From the drums or similar containers pumping all kinds of corrosive impurities, suitable for electric pump, low viscosity liquid. Equipped with different material and motor, conveying diesel, kerosene, engine oil, gasoline, hydraulic oil, vegetable oil, milk, beverage, and chemical liquid medium.



用途和特点 Use and characteristic

体积小，重量轻，使用灵活，经久耐用。
适用于200L或220L油桶或类似容器，其他尺寸可定做。
应用于油库，油站，工厂，轮船等。

Small size, light weight, flexible use, durable use.
For 200L or 220L oil drums or similar containers, Other sizes can be customized
Applied in oil depot, oil station, factory, ship, etc..

主要技术参数 Technical Specification

型号 Model	WDJK-3B	WDJK-3BS	WDTB-40	WDTB-40S	WDQD-40
进出口口径 Import and export caliber	50/20	55/20	55/20	55/22	40/25
流量 (min)Flow	50	50	50	50	50
扬程 (m)Head	2.5	2.5	2.5	2.5	10
功率 (kw)Power	0.12	0.12	0.12防爆EX	0.12防爆EX	气动Pneumatic
转速 (rpm)Speed	2800	2800	2800	2800	/
泵体材料 Pump body material	铝合金Aluminium alloy	不锈钢SS304	铝合金Aluminium alloy	不锈钢SS304	不锈钢SS304
叶轮/出口材料 Impeller/outlet material	塑料/PP	塑料/PP	塑料/PP	塑料/PP	/

防爆电动油泵总成 Electric Transfer Pump,Explosion Proof

WDTP 电动抽液泵 WDTP Electric transfer pump



用途和特点 Use and characteristic

用于汽油，甲醇，酒精，食用油，植物油，化学溶液，热油

220V 380V防爆电机

氟橡胶油封/高硬度齿轮/防腐蚀泵体/耐高温

For gasoline, methanol, alcohol, For edible oil, vegetable oil, chemical solution, hot oil

220V 380V explosion proof motor

Fluorine rubber oil seal/High hardness gear/Corrosion /proof pump body/high temperature resistance

主要技术参数 Technical Specification

型号 Model	WDTP-3-1	WDTP-4	WDTP-1	WDTP-2	WDTP-6	WDTP-7
进出口 Import and export	50/25	50/25	45/25	50/25	40/25	40/25
最大流量 Maximum flow	150L/min	150L/min	130L/min	130L/min	100L/min	100L/min
电机 Electric machinery	880W	880W	880W	880W	550W	550W
电压 Voltage	AC220V 50HZ					
转速 Speed	12000RPM		10000RPM		8000RPM	
泵体材料 Pump body material	不锈钢SS304	铝合金Aluminium alloy	不锈钢SS304	铝合金Aluminium alloy	不锈钢SS304	铝合金Aluminium alloy
叶轮材料 Impeller material	不锈钢SS304	塑料PP	不锈钢SS304	塑料PP	不锈钢SS304	塑料PP
净重 Net weight	8kg/pc	6.3kg/pc	8.3kg/pc	6.7kg/pc	6.6kg/pc	5.4kg/pc
包装尺寸 Packaging size	145 × 31 × 20cm 2pc/carton		130 × 33 × 21cm 2pc/carton		132 × 31 × 18cm 2pc/carton	

ABOUT US

We are the gas station equipment supplier in Hydrogen Energy, Liquid Natural Gas, Compressed Natural Gas, Liquid Petrol Gas, Fuel, Adblue, EV charger, Home Energy Storage, Industrial Energy Storage area. If you are doing the same range business, if you are interested in new energy, welcome you to visit us!

We have many certificates like ISO, CE, ATEX, PED, TUV, PEI, CPA, CMA, Explosion proof certificates and soon. We have our own Patent and copyrights.

Wish our products, our service can give you a strong impression.

Well Quality We Done! Well Service We Done! Well Price We Done!

We are Welldone Group!

HONOR



Fuel Dispenser ATEX



LNG Dispenser ATEX



Mobile Gas Station ATEX



LNG Dispenser PED



Submersible Turbine Pump ATEX




Junction Box ATEX



LPG dispenser ATEX-D



LPG dispenser ATEX-B

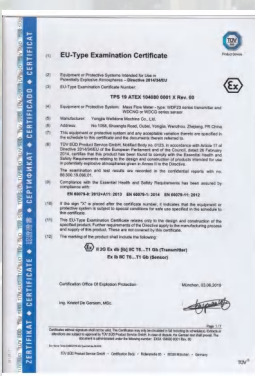

Mass Meter ATEX



Positive Displacement Meter CE



Mobile Gas Station CE



Adblue Dispenser CE



LNG Dispenser CE



CNG Dispenser CE



LPG Dispenser CE




Fuel Dispenser CE



EV Charger TUV



PEI

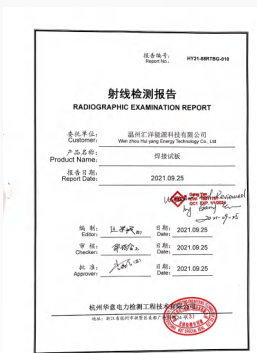

Radiographic Examination Report



CNG Dispenser Explosion Proof CMA



LNG Dispenser Explosion Proof CMA



PQR Test Report



Patent Certificates For Management System



Factory ISO



LNG Dispenser CPA



CNG Dispenser CPA



Welldone Copyrights



E-BOOK